

START Panel Flat UGR19 1200x300


START Panel Flat UGR19 1200x300 3500Lm 840

0047233



Product features

- Edge lit LED flat panel with low glare (UGR<19). Low Flicker, 35 W, Neutral White, 4000 K, 3500 lumens, 100 lm/W, Average lifespan: 120.000Hrs, prismatic diffuser, aluminium frame, steel body, electronic non dimmable driver. (HxWxD) 10.8 x 1195 x 295 mm

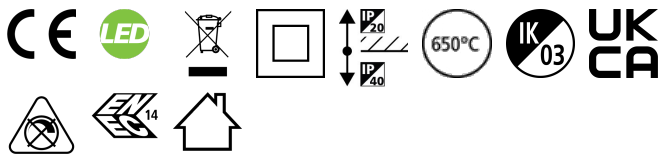


PRODUCT OVERVIEW

Product name	START Panel Flat UGR19 1200x300 3500Lm 840
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting, Ceiling surface mounting, Suspended
Environment	Interior
General application	Education, Office
ETIM Class	EC002892
E-number FI	4276954
Warranty	5 years
Fixture luminous flux (lm)	3,550
Luminaire efficacy (lm/W)	101
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	90
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	35
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288472331

PHOTOMETRY

START Panel Flat UGR19 1200x300
START Panel Flat UGR19 1200x300 3500Lm 840
0047233

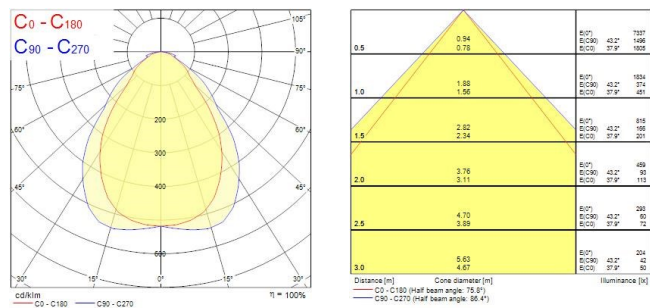

TECHNICAL DRAWINGS

