


Sylproof Tubular LED - Electronic

Sylproof Tubular LED 2X1500 EB WW
0047591



Product features

- Aesthetically attractive and highly efficient LED tubular luminaire, opaque acrylic diffuser, stainless steel end caps and mounting brackets, rapid connector, as Sylvania Sylproof Tubular LED

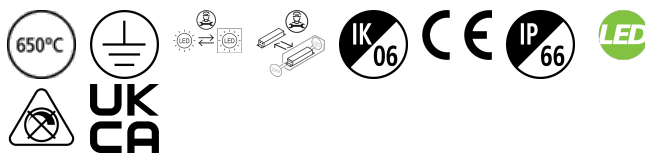

PRODUCT OVERVIEW

Product name	Sylproof Tubular LED 2X1500 EB WW
Technology	LED
Cap/Base	N/A
Housing	Acrylic PMMA
Mount	Ceiling surface mounting
Environment	Interior
General application	Logistics & Industry
ETIM Class	EC000109
Warranty	5 years
Fixture luminous flux (lm)	5597
Luminous flux (lm)	5597
Luminaire efficacy (lm/W)	115.4
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG0
Total power consumption (W)	49
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	No
Housing colour	Transparent
IP rating	IP66
IK rating	IK06
Product EAN number	5410288475912


PHOTOMETRY

Sylproof Tubular LED - Electronic Sylproof Tubular LED 2X1500 EB WW 0047591

Distance [m]	Core diameter [m]	E07	E10	E15	E20	E30	E40	E50	E60	E70	E80	E90	E100
0.5	1.16 2.19	6122	4821	3366	2396	1808	1324	957	696	504	372	276	204
1.0	2.32 4.39	1531	1205	842	599	427	316	228	169	123	90	66	49
1.5	3.48 6.58	385	301	211	152	107	78	56	41	29	21	15	11
2.0	4.63 8.75	181	141	100	72	51	37	27	19	14	10	7	5
2.5	5.79 10.97	87	68	49	36	25	18	13	9	6	4	3	2
3.0	6.95 13.17	41	32	23	17	12	8	6	4	3	2	1	1

Distance [m] Core diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 13.2°)
— C90 - C270 (Half beam angle: 86.4°)

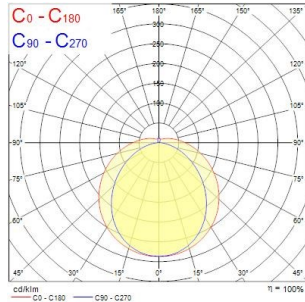

TECHNICAL DRAWINGS

