

## CMI-T CMI-T 35W/WDL UVS 0020365



### Product features



### PRODUCT OVERVIEW

Product name	CMI-T 35W/WDL UVS
Technology	HID
Watt (Rated) (W)	39
Lamp shape	Tubular shape
Type	CMI-T
Cap/Base	G12
Lamp finish	Clear
Fixture rating	Enclosed
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail
ETIM Class	EC000037
E-number FI	4844400
E-number SE	8359031
E-number Norway	3800940
Luminous flux (lm)	3750
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	86
Wattage (W)	35.00
Product Voltage (V)	80
Dimmable	Yes
Average life (Nominal) (h)	15000
Product EAN number	5410288203652

### DATA TABLE

#### General data

Product name	CMI-T 35W/WDL UVS
Technology	HID
Watt (Rated) (W)	39
Lamp shape	Tubular shape
Type	CMI-T

## CMI-T

CMI-T 35W/WDL UVS

0020365

Cap/Base	G12
Lamp finish	Clear
Fixture rating	Enclosed
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail
ETIM Class	EC000037
E-number FI	4844400
E-number SE	8359031
E-number Norway	3800940

### Optical data

Luminous flux (lm)	3750
Luminous flux (Rated) (lm)	3750
Ambient temperature for maximum luminous flux (°C)	25
Colour temperature (K)	3000
Light colour	Warm White
Colour Code	830
CRI (Ra)	86
Adjustable chromaticity	N
Rated lumen maint. factor (%) at 4000 h 50Hz	83
Rated lumen maint. factor (%) at 6000 h 50Hz	82
Rated lumen maint. factor (%) at 8000 h 50Hz	79
Rated lumen maint. factor (%) at 12000 h 50Hz	76
Rated lumen maint. factor (%) at 16000 h 50Hz	71

### Electrical data

Wattage (W)	35.00
Current (A)	0.49
Product Voltage (V)	80
Control gear required	Yes
Transformer required	No
Dimmable	Yes
kWh per 1000 hours burning time	43

### Lifetime data

Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000
Life T90	9000
Rated survival factor (%) at 2000 h 50Hz	100
Rated survival factor (%) at 4000 h 50Hz	99
Rated survival factor (%) at 6000 h 50Hz	98
Rated survival factor (%) at 8000 h 50Hz	93
Rated survival factor (%) at 12000 h 50Hz	74

## CMI-T

CMI-T 35W/WDL UVS

0020365

Rated survival factor (%) at 16000 h 50Hz	42
---	----

### Physical data

Max. Lamp Diameter (mm) - D	20
Weight (kg)	0.029

### Packaging

Single packaging type	Carton
Product EAN number	5410288203652
Packaging single length / height (cm)	10.9
Packaging single width (cm)	3.1
Packaging single depth (cm)	2.3
DUN14 (inner)	15410288203659
Units per inner package	12
Packaging inner length / height (cm)	12.2
Packaging inner width (cm)	8.4
Packaging inner depth (cm)	14.0
DUN14 (outer)	35410288203653
Units per outer package	96
Packaging outer length / height (cm)	14.4
Packaging outer width (cm)	34.6
Packaging outer depth (cm)	29.4


### Safety data

Lamp mercury content (mg)	4.50
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Suitable for household illumination	Yes


## PHOTOMETRY

## CMI-T CMI-T 35W/WDL UVS 0020365


LAMP SPECTRUM

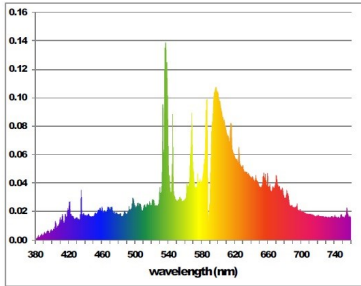


CMI 3000K



CMI 4200K




COLOUR RENDERING

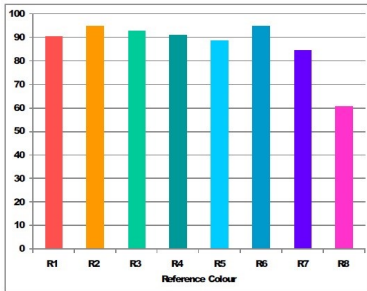

## TECHNICAL DRAWINGS

SURVIVAL RATE



LUMEN MAINTENANCE

