

## Brio IP65 LED - Vandal Resistant

*BRIO IP55VR LED 3000K Emergency*  
4054969



### PRODUCT OVERVIEW

Product name	BRIO IP55VR LED 3000K Emergency
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Environment	Exterior Interior
General application	Logistics & Industry, Museums & Galleries, Office, Retail
ETIM Class	EC002892
Colour temperature (K)	3000
Electrical protection	Class II
Control gear mounting	Integral
Housing colour	Black
IP rating	IP55
IK rating	IK10
Product EAN number	5026524549691

### DATA TABLE

#### General data

Product name	BRIO IP55VR LED 3000K Emergency
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Environment	Exterior Interior
General application	Logistics & Industry, Museums & Galleries, Office, Retail
ETIM Class	EC002892

#### Optical data

Colour temperature (K)	3000
Correlated colour temperature range (K)	3000 - 3000
Adjustable chromaticity	N
Distribution type	Symmetric

## Brio IP65 LED - Vandal Resistant

*BRIO IP55VR LED 3000K Emergency*  
4054969

Emergency duration (h)	3
------------------------	---

### Electrical data

Mains voltage (V)	230V~
Electrical protection	Class II
Control gear mounting	Integral
Transformer required	Yes
Drive current (mA)	350


### Physical data

Housing colour	Black
IP rating	IP55
IK rating	IK10
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	White
Nominal Product Length (mm)	408
Nominal Product Width (mm)	358
Weight (kg)	3.2

### Packaging

Single packaging type	Carton
Product EAN number	5026524549691
Packaging single length / height (cm)	50.0
Packaging single width (cm)	50.0
Packaging single depth (cm)	20.0
Units per outer package	1
Packaging outer length / height (cm)	50.0
Packaging outer width (cm)	50.0
Packaging outer depth (cm)	20.0

## PHOTOMETRY

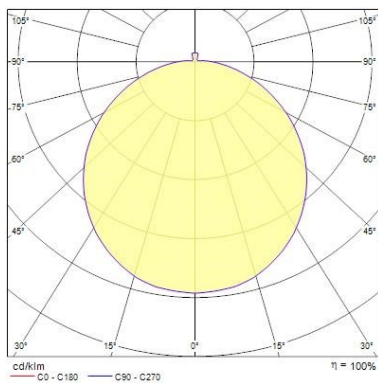

Distance [m]	Cone diameter [m]	E <sub>0</sub> [lx]	E <sub>1</sub> [lx]	E <sub>2</sub> [lx]
0.5	1.57	196	57.5°	15
1.0	3.14	49	57.5°	4
1.5	4.71	22	57.5°	2
2.0	6.28	12	57.5°	1
2.5	7.85	8	57.5°	1
3.0	9.42	6	57.5°	0

Distance [m]      Cone diameter [m]      Illuminance [lx]  
C0 - C180 (Half beam angle: 115.0°)

**Brio IP65 LED - Vandal Resistant**  
*BRIO IP55VR LED 3000K Emergency*  
**4054969**

## TECHNICAL DRAWINGS

---

