

Lynx T

LYNX-T 26W/840 GX24D-3 SLV
0027812



Product features

- Triple bend compact pin-base lamps, - Suitable for operation on Magnetic control gear, - Excellent colour rendering



PRODUCT OVERVIEW

Product name	LYNX-T 26W/840 GX24D-3 SLV
Technology	Compact Fluorescent
Watt (Rated) (W)	26
Lamp shape	Other
Type	Lynx T
Cap/Base	GX24d-3
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000087
E-number FI	4944064
E-number SE	8357414
E-number Norway	3825356
Luminous flux (lm)	1800
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	82
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	Not applicable
Wattage (W)	26
Product Voltage (V)	220
Dimmable	No
Average life (Nominal) (h)	12000
Product EAN number	5410288278124

DATA TABLE

General data

Product name	LYNX-T 26W/840 GX24D-3 SLV
Technology	Compact Fluorescent
Watt (Rated) (W)	26
Lamp shape	Other
Type	Lynx T

Lynx T

LYNX-T 26W/840 GX24D-3 SLV
0027812

Cap/Base	GX24d-3
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000087
E-number FI	4944064
E-number SE	8357414
E-number Norway	3825356

Optical data

Luminous flux (lm)	1800
Luminous flux (Rated) (lm)	1800
Rated lamp efficacy 100h 50Hz at 25°C (lm/W)	66
Ambient temperature for maximum luminous flux (°C)	25
Colour temperature (K)	4000
Light colour	Cool White
Colour Code	840
CRI (Ra)	82
Colour Variation Initial (SDCM)	SDCM5
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 2000 h 50Hz	85
Rated lumen maint. factor (%) at 4000 h 50Hz	78
Rated lumen maint. factor (%) at 8000 h 50Hz	75

Electrical data

Wattage (W)	26
Starting time (max) (s)	10 Sec
Current (A)	0.325
Product Voltage (V)	220
Ignition voltage (V)	194
Control gear required	Yes
Transformer required	No
Dimmable	No
Lamp Energy Label (class)	G
kWh per 1000 hours burning time	26

Lifetime data

Average life (Nominal) (h)	12000
Average life (Rated) (h)	12000
Rated survival factor (%) at 2000 h 50Hz	96
Rated survival factor (%) at 4000 h 50Hz	90
Rated survival factor (%) at 6000 h 50Hz	80
Rated survival factor (%) at 8000 h 50Hz	72

Lynx T

LYNX-T 26W/840 GX24D-3 SLV
0027812

Rated survival factor (%) at 12000 h 50Hz	50
---	----

Physical data

Nominal Product Height (mm)	141
Nominal Product Diameter (mm)	49
Max. Length base to base (mm) - A	148
Max. Lamp Diameter (mm) - D	13
Weight (kg)	0.082


Packaging

Single packaging type	Carton
Product EAN number	5410288278124
Packaging single length / height (cm)	4.8
Packaging single width (cm)	4.8
Packaging single depth (cm)	13.6
DUN14 (outer)	15410288278121
Units per outer package	10
Packaging outer length / height (cm)	26.4
Packaging outer width (cm)	10.8
Packaging outer depth (cm)	14.2


Safety data

Lamp mercury content (mg)	2.5
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes

PHOTOMETRY

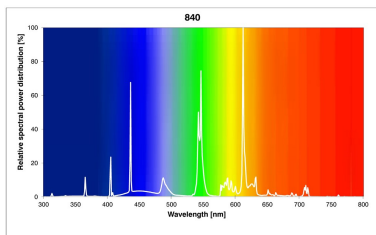

TECHNICAL DRAWINGS

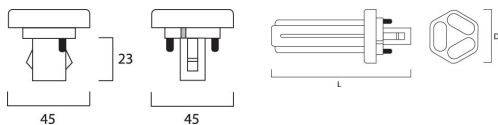

SYLVANIA

Lynx T
LYNX-T 26W/840 GX24D-3 SLV
0027812



26
kWh/1000h




SYLVANIA

Lynx T
LYNX-T 26W/840 GX24D-3 SLV
0027812



0027812

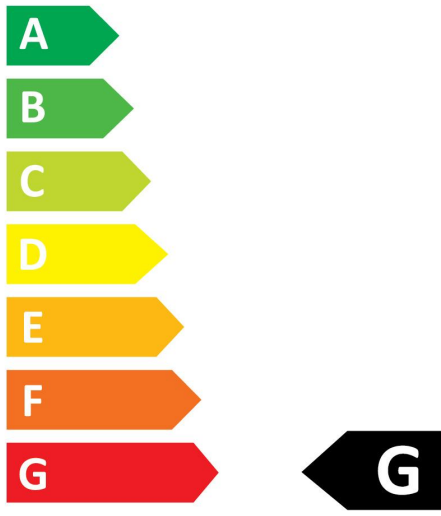

26
kWh/1000h



2019/2015