Concord

Brio IP65 LED BRIO IP55 LED 3k Emergency Silver 4054941





PRODUCT OVERVIEW

Product name	BRIO IP55 LED 3k Emergency Silver
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Environment	Exterior
General application	Education, Logistics & Industry, Museums & Galleries, Office
ETIM Class	EC002892
Colour temperature (K)	3000
Control gear mounting	Integral
Housing colour	Silver
IP rating	IP55
IK rating	IK10
Product EAN number	5026524549417

DATA TABLE


General data	
Product name	BRIO IP55 LED 3k Emergency Silver
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Environment	Exterior
General application	Education, Logistics & Industry, Museums & Galleries, Office
ETIM Class	EC002892
Optical data	
Colour temperature (K)	3000
Correlated colour temperature range (K)	3000 - 3000
Adjustable chromaticity	Ν
Distribution type	Symmetric
Emergency duration (h)	3
Electrical data	
Mains voltage (V)	230V~
Control gear mounting	Integral

Concord

Brio IP65 LED BRIO IP55 LED 3k Emergency Silver 4054941

Transformer required	Yes
Drive current (mA)	350
Physical data	
Housing colour	Silver
IP rating	IP55
IK rating	IK10
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	White
Nominal Product Length (mm)	408
Nominal Product Width (mm)	358
Weight (kg)	3.2
Packaging	
Single packaging type	Carton
Product EAN number	5026524549417
Packaging single length / height (cm)	50.0
Packaging single width (cm)	50.0
Packaging single depth (cm)	20.0
Units per outer package	1
Packaging outer length / height (cm)	50.0
Deckeging outer width (em)	50.0
Packaging outer width (cm)	50.0
Packaging outer depth (cm)	20.0

PHOTOMETRY

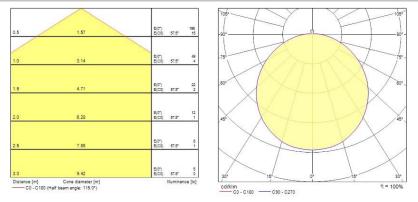

TECHNICAL DRAWINGS

Concord

Brio IP65 LED BRIO IP55 LED 3k Emergency Silver 4054941

