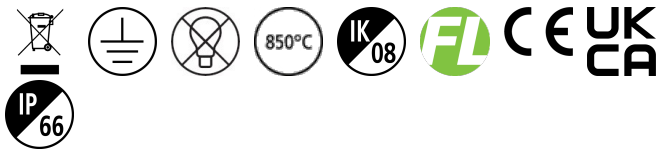# Start Tubular - Electronic
Start Tubular IP66 214 EB 840
0042302

Product features

- Start Tubular IP66 214 EB 840

PRODUCT OVERVIEW

Product name	Start Tubular IP66 214 EB 840
Technology	Fluorescent
Housing	PC Polycarbonate
Environment	Interior
General application	Hospitality, Logistics & Industry
Warranty	2 years
Fixture luminous flux (lm)	2280
Luminaire efficacy (lm/W)	76
LOR (%)	80
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	85
Total power consumption (W)	30
Electrical protection	Class I
Control gear type	Electronic ballast
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP66
IK rating	IK08
Product EAN number	5410288423029
Light source included	0002761

PHOTOMETRY