

TubiXx LED Pendant

TubiXx LED pendant 2700K black-gold
2061000



Product features

- TubiXx LED Pendant is a decorative pendant fixture with integrated driver, equipped with an integrated non-dimmable LED driver, Black finish with Gold reflector, colour temperature 2700K, 14W, 1152lm, 82lm/W, IP20, IK02, Class I. Dimensions 250mmx80mm (Cable length 1.5m).



PRODUCT OVERVIEW

Product name	TubiXx LED pendant 2700K black-gold
Technology	LED
Housing	Aluminium
Mount	Pendant surface
General application	Hospitality, Residential & Consumer, Retail
ETIM Class	EC001743
Warranty	5 years
Fixture luminous flux (lm)	1152
Luminaire efficacy (lm/W)	82
LOR (%)	100
Colour temperature (K)	2700
CRI (Ra)	92
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	82
Photobiological Risk Group	RG1
Total power consumption (W)	14
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Remote
Dimmable	Yes
Housing colour	RAL 9005 - Jet black
IP rating	IP20
IK rating	IK02
Product EAN number	5025768610006

DATA TABLE

General data

Product name	TubiXx LED pendant 2700K black-gold
Technology	LED
Housing	Aluminium
Mount	Pendant surface

TubiXx LED Pendant

TubiXx LED pendant 2700K black-gold

2061000

General application	Hospitality, Residential & Consumer, Retail
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001743
Warranty	5 years

Optical data

Fixture luminous flux (lm)	1152
Luminaire efficacy (lm/W)	82
LOR (%)	100
Colour temperature (K)	2700
CRI (Ra)	92
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	82
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	14
Mains voltage (V)	220-240V~
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	10
Electrical protection	Class I
Control gear required	No
Control gear type	Electronic ballast
Control gear mounting	Remote
Dimmable	Yes
Drive current (mA)	350
Inrush Current (A)	17
Inrush Duration (µs)	199
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	38
Max. Luminaires per 13A C Breaker	50
Max. Luminaires per 16A C Breaker	61
Max. Luminaires per 20A C Breaker	78
Max. Luminaires per 10A B Breaker	23
Max. Luminaires per 13A B Breaker	30
Max. Luminaires per 16A B Breaker	37
Max. Luminaires per 20A B Breaker	47

Lifetime data

Lifespan L70 B50	50000
Lifespan L70 B10	50000
Lifespan L80 B50	50000
Lifespan L80 B10	50000
Lifespan L90 B50	50000
Lifespan L90 B10	50000

TubiXx LED Pendant

TubiXx LED pendant 2700K black-gold
2061000



Physical data

Housing colour	RAL 9005 - Jet black
IP rating	IP20
IK rating	IK02
Nominal Product Length (mm)	250
Nominal Product Diameter (mm)	80
Weight (kg)	1.1

Packaging

Single packaging type	Carton
Product EAN number	5025768610006
Packaging single length / height (cm)	35.0
Packaging single width (cm)	10.0
Packaging single depth (cm)	10.0
DUN14 (outer)	05025768610006
Units per outer package	1
Packaging outer length / height (cm)	35.0
Packaging outer width (cm)	10.0
Packaging outer depth (cm)	10.0

PHOTOMETRY

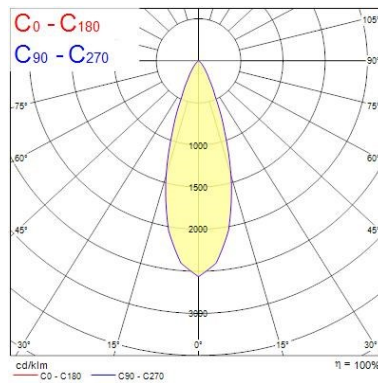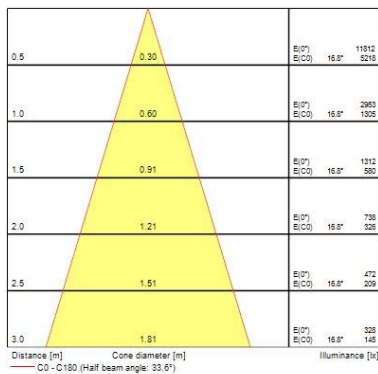

TECHNICAL DRAWINGS

