


## Myriad Pendant White - Remote Gear

MYRIAD PENDANT 3000K REMOTE GEAR PHASE DIM WHITE  
2049585



### Product features

- High-end architectural (3000K) warm white LED pendant with Phase dimmable driver and remote gear housing, finished in a white finish (RAL9016)

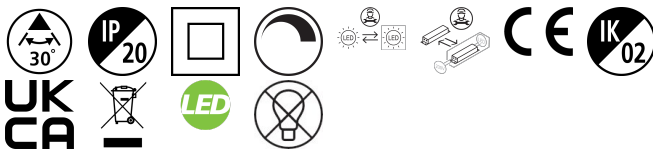

### PRODUCT OVERVIEW

Product name	MYRIAD PENDANT 3000K REMOTE GEAR PHASE DIM WHITE
Technology	LED
Mount	Ceiling surface mounting
Environment	Indoor
General application	Hospitality, Office, Retail, Residential & Consumer
ETIM Class	EC001743
Warranty	5 years
Fixture luminous flux (lm)	1114
Luminaire efficacy (lm/W)	111.4
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	30

## Myriad Pendant White - Remote Gear

*MYRIAD PENDANT 3000K REMOTE GEAR PHASE DIM WHITE*  
2049585

Total power consumption (W)	10
Electrical protection	Class II
Control gear mounting	Remote
Dimmable	Yes
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768495856

### DATA TABLE

#### General data

Product name	MYRIAD PENDANT 3000K REMOTE GEAR PHASE DIM WHITE
Technology	LED
Mount	Ceiling surface mounting
Environment	Indoor
General application	Hospitality, Office, Retail, Residential & Consumer
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001743
Warranty	5 years

#### Optical data

Fixture luminous flux (lm)	1114
Luminaire efficacy (lm/W)	111.4
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Beam Angle (°)	30
Distribution type	Symmetric

#### Electrical data

Total power consumption (W)	10
Mains voltage (V)	220-240V~
Electrical protection	Class II
Control gear mounting	Remote
Transformer required	Yes
Dimmable	Yes
Drive current (mA)	250
Nominal Frequency (Hz)	50/60Hz

#### Lifetime data

Lifespan L70 B50	50000
------------------	-------

#### Physical data

Housing colour	White
----------------	-------

## Myriad Pendant White - Remote Gear


MYRIAD PENDANT 3000K REMOTE GEAR PHASE DIM WHITE  
2049585

IP rating	IP20
IK rating	IK02
Nominal Product Length (mm)	75
Nominal Product Width (mm)	75
Nominal Product Height (mm)	129
Nominal Product Diameter (mm)	75
Max. Lamp Diameter (mm) - D	75
Weight (kg)	0.45

### Packaging

Single packaging type	Carton
Product EAN number	5025768495856
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

## PHOTOMETRY

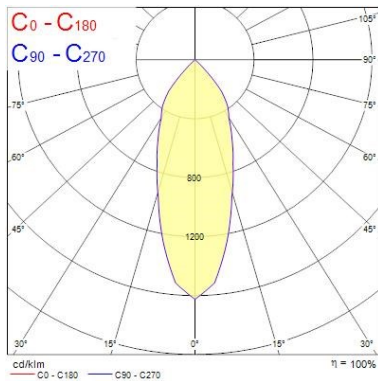

Distance [m]	Cone diameter [m]	E <sub>0</sub> [lx]	E <sub>1</sub> [lx]	E <sub>2</sub> [lx]
0.5	0.33	7241	1810	710
1.0	0.67	1810	452	178
1.5	1.00	805	201	81
2.0	1.34	452	113	45
2.5	1.67	290	72	28
3.0	2.01	201	51	20

Distance [m] Cone diameter [m] Illuminance [lx]  
C0 - C180 (Half beam angle: 37.9°)

## TECHNICAL DRAWINGS

