

## Monitor LED

Monitor LED 3000K Silver

4055068



### PRODUCT OVERVIEW

Product name	Monitor LED 3000K Silver
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Environment	Exterior Interior
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail
ETIM Class	EC002892
Colour temperature (K)	3000
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Integral
Housing colour	Silver
IP rating	IP55
IK rating	IK10
Product EAN number	5026524550680

### DATA TABLE

#### General data

Product name	Monitor LED 3000K Silver
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Environment	Exterior Interior
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail
ETIM Class	EC002892

#### Optical data

Colour temperature (K)	3000
Correlated colour temperature range (K)	3000 - 3000
Adjustable chromaticity	N
Distribution type	Symmetric

## Monitor LED

Monitor LED 3000K Silver  
4055068

### Electrical data

Mains voltage (V)	230V~
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Integral
Transformer required	Yes
Drive current (mA)	350


### Physical data

Housing colour	Silver
IP rating	IP55
IK rating	IK10
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	White
Nominal Product Length (mm)	350
Nominal Product Width (mm)	350
Weight (kg)	4.0

### Packaging

Single packaging type	Carton
Product EAN number	5026524550680
Packaging single length / height (cm)	36.0
Packaging single width (cm)	36.0
Packaging single depth (cm)	13.5
Units per outer package	1
Packaging outer length / height (cm)	36.0
Packaging outer width (cm)	36.0
Packaging outer depth (cm)	13.5


## PHOTOMETRY

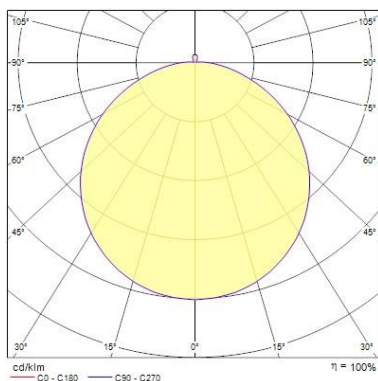

0.5	1.56	E(0°) E(C0)	57.3°	1290 102
1.0	3.12	E(0°) E(C0)	57.3°	323 25
1.5	4.67	E(0°) E(C0)	57.3°	144 11
2.0	6.23	E(0°) E(C0)	57.3°	81 6
2.5	7.79	E(0°) E(C0)	57.3°	62 4
3.0	9.35	E(0°) E(C0)	57.3°	36 3

Distance [m] Cone diameter [m]  
C0 - C180 (Half beam angle: 114.6°)  
Illuminance [lx]

Monitor LED  
Monitor LED 3000K Silver  
4055068

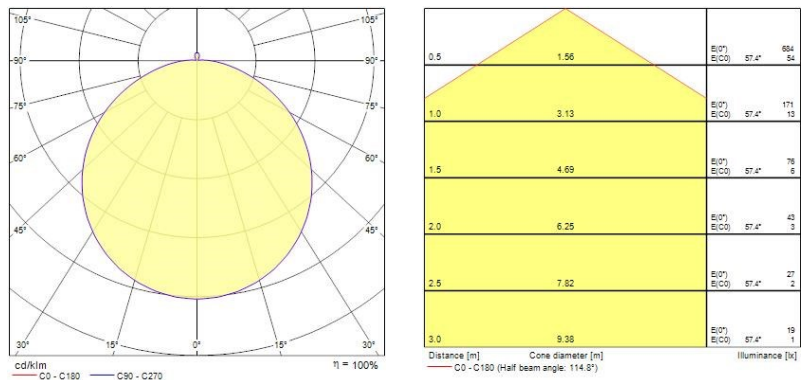

TECHNICAL DRAWINGS

