


## START eco Panel Flat 600x600

START eco Panel Flat 600x600 3200Lm 840  
0047401



### Product features

- Edge lit LED flat panel low output. 40 W, Neutral White, 4000 K, 3200 lumens, 80 lm/W, 30000 hours lifetime (L70), PMMA opal diffuser, aluminium frame, steel body, electronic non dimmable driver. (HxWxD) 10.5 x 595 x 595 mm

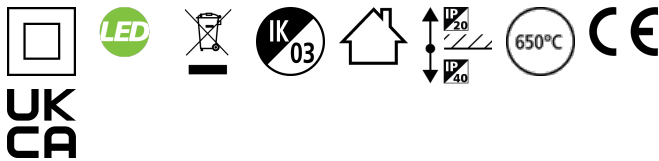


### PRODUCT OVERVIEW

Product name	START eco Panel Flat 600x600 3200Lm 840
Technology	LED
Housing	Steel
Mount	Ceiling recessed mounting
Environment	Interior
General application	Education, Office
ETIM Class	EC002892
E-number FI	4276964
E-number SE	7013616
Warranty	3 years
Fixture luminous flux (lm)	3200
Luminaire efficacy (lm/W)	80
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	6
Beam Angle (°)	120
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	40
Electrical protection	Class II
Control gear type	Electronic ballast
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288474014

## START eco Panel Flat 600x600

START eco Panel Flat 600x600 3200Lm 840  
0047401

### PHOTOMETRY

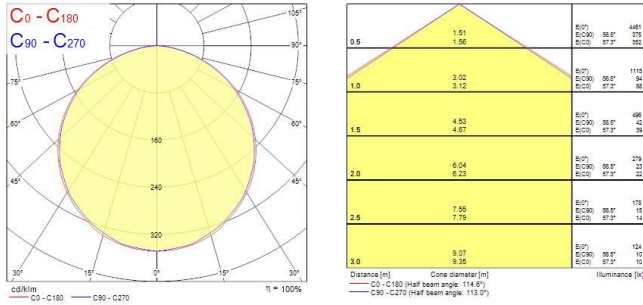

### TECHNICAL DRAWINGS

