

Sylmaster T8 PA Louvre - Electronic Ballast

T26 2x36W G13
0055115



Product features

- Sylmaster T8 PA Louvre - Electronic Ballast



PRODUCT OVERVIEW

Product name	T26 2x36W G13
Technology	Fluorescent
Cap/Base	G13
Housing	Steel
Mount	Ceiling surface mounting
Environment	Interior
General application	Education, Hospitality, Office, Retail
ETIM Class	EC002892
Warranty	2 years
Fixture luminous flux (lm)	4355
Luminaire efficacy (lm/W)	60
LOR (%)	65
Light colour	N/A
Total power consumption (W)	72
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Integral
Dimmable	No
Housing colour	White
IP rating	IP20
IK rating	IK07
Product EAN number	5410288551159
Light source included	N/A - Not Applicable

DATA TABLE

General data

Product name	T26 2x36W G13
Technology	Fluorescent
Cap/Base	G13
Housing	Steel
Mount	Ceiling surface mounting
Environment	Interior

Sylmaster T8 PA Louvre - Electronic Ballast

T26 2x36W G13

0055115

General application	Education, Hospitality, Office, Retail
ETIM Class	EC002892
Warranty	2 years

Optical data

Fixture luminous flux (lm)	4355
Luminaire efficacy (lm/W)	60
LOR (%)	65
Light colour	N/A
Adjustable chromaticity	N

Electrical data

Total power consumption (W)	72
Mains voltage (V)	220-240V~
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Integral
Transformer required	Yes
Dimmable	No
Glow Wire Test (°C)	960
Nominal Frequency (Hz)	50Hz

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK07
Nominal Product Length (mm)	1250
Nominal Product Width (mm)	202
Nominal Product Height (mm)	85
Weight (kg)	2.172

Packaging

Single packaging type	Carton
Product EAN number	5410288551159
Packaging single length / height (cm)	126.0
Packaging single width (cm)	9.0
Packaging single depth (cm)	21.0
DUN14 (outer)	05410288551159
Units per outer package	1
Packaging outer length / height (cm)	126.0
Packaging outer width (cm)	9.0
Packaging outer depth (cm)	21.0


PHOTOMETRY

Sylmaster T8 PA Louvre - Electronic Ballast T26 2x36W G13 0055115

0.5	1.25 1.38	E(0°) E(C90) E(C0)	6666 816 617
1.0	2.50 2.76	E(0°) E(C90) E(C0)	1666 204 169
1.5	3.74 4.14	E(0°) E(C90) E(C0)	741 91 75
2.0	4.99 5.63	E(0°) E(C90) E(C0)	417 51 42
2.5	6.24 6.91	E(0°) E(C90) E(C0)	267 33 27
3.0	7.49 8.29	E(0°) E(C90) E(C0)	185 23 19

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 108.2°)
— C90 - C270 (Half beam angle: 102.6°)

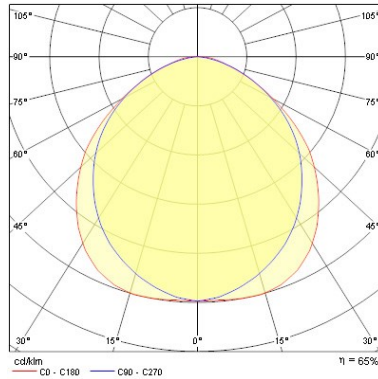

TECHNICAL DRAWINGS

Dimensions (mm)	L	l	W	H	Weight (kg)
1x26W	1250	202	85	1800	3.5
1x36W	1350	202	85	1800	5.5
1x36W	1414	202	85	1800	7.0
2x36W	1250	202	85	1800	5.5
2x36W	1350	202	85	1800	6.5
2x36W	1414	202	85	1800	7.0

