


Start Surface IP66 Ø300mm Sensor Dim

START SURFACE IP66 1050LM 830 IK10 MW SENS WHT
0049290



Product features

- Sensor Dim LED exterior surface mounted luminaire, 1050lm, 12W power consumption, 88lm/W efficacy, 3000K color temperature, CRI80, IP66, IK10, 50,000 hours (L70), white housing, vandal resistant

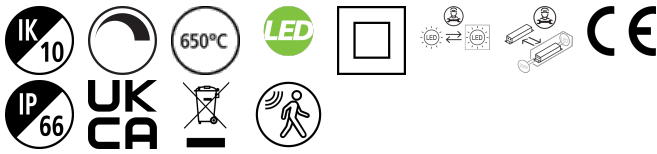


PRODUCT OVERVIEW

Product name	START SURFACE IP66 1050LM 830 IK10 MW SENS WHT
Technology	LED
Housing	PC Polycarbonate
Environment	Indoor, Outdoor
General application	Hospitality
ETIM Class	EC002892
E-number FI	4274704
E-number SE	7505134
Warranty	5 years
Fixture luminous flux (lm)	1050
Luminaire efficacy (lm/W)	88
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Beam Angle (°)	120
Beam Angle (°)	110
Photobiological Risk Group	RG0
Total power consumption (W)	12
Electrical protection	Class II
Dimmable	Yes
LED Flickering Rate	High (>40%)
Housing colour	RAL 9003 - Signal white
IP rating	IP66
IK rating	IK10
Product EAN number	5410288492902

PHOTOMETRY

Start Surface IP66 Ø300mm Sensor Dim *START SURFACE IP66 1050LM 830 IK10 MW SENS WHT* 0049290

0.5	1.48	E(0°) E(C0)	85.9°	1288 32
1.0	2.95	E(0°) E(C0)	85.9°	320 20
1.5	4.43	E(0°) E(C0)	85.9°	101 13
2.0	5.91	E(0°) E(C0)	85.9°	65 7
2.5	7.38	E(0°) E(C0)	85.9°	54 5
3.0	8.85	E(0°) E(C0)	85.9°	38 3
Distance [m]	Cone diameter [m]	Illuminance [lx]		
C0 - C180 (Half beam angle: 111.8°)				



TECHNICAL DRAWINGS

