

## Sylproof Tubular LED - Electronic

*Sylproof Tubular LED 2X1200 EB WW*  
0047590



### Product features

- Aesthetically attractive and highly efficient LED tubular luminaire, opaque acrylic diffuser, stainless steel end caps and mounting brackets, rapid connector, as Sylvania Sylproof Tubular LED




## PRODUCT OVERVIEW

Product name	Sylproof Tubular LED 2X1200 EB WW
Technology	LED
Cap/Base	N/A
Housing	Acrylic PMMA
Mount	Ceiling surface mounting
Environment	Interior
General application	Logistics & Industry
ETIM Class	EC000109
Fixture luminous flux (lm)	4100
Luminous flux (lm)	4100
Luminaire efficacy (lm/W)	105.12
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG0
Total power consumption (W)	39
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	No
Housing colour	Transparent
IP rating	IP66
IK rating	IK06
Product EAN number	5410288475905

## PHOTOMETRY

Sylproof Tubular LED - Electronic  
Sylproof Tubular LED 2X1200 EB WW  
0047590

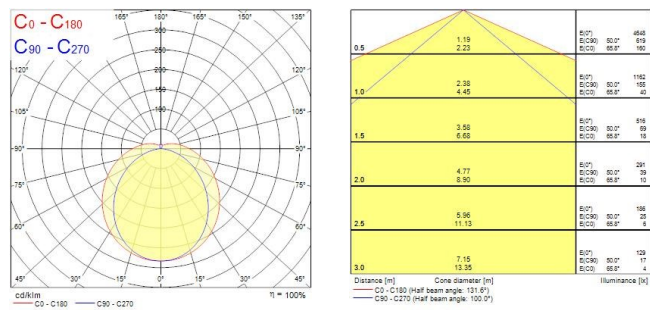

TECHNICAL DRAWINGS

