


Sylmaster T8 White Louvre - Electronic Ballast

T26 1x58W G13
0055090



Product features

- Sylmaster T8 White Louvre - Electronic Ballast

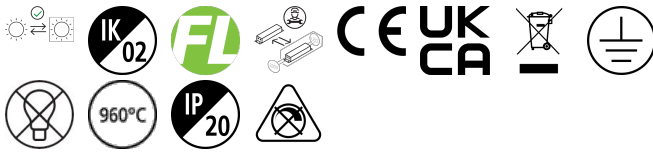

PRODUCT OVERVIEW

Product name	T26 1x58W G13
Technology	Fluorescent
Cap/Base	G13
Housing	Steel
Mount	Ceiling surface mounting
Environment	Interior
General application	Education, Hospitality, Office, Retail
ETIM Class	EC002892
Warranty	2 years
Fixture luminous flux (lm)	3250
Luminaire efficacy (lm/W)	59
LOR (%)	65
Light colour	N/A
Total power consumption (W)	55
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Integral
Dimmable	No
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5410288550909
Light source included	N/A - Not Applicable

DATA TABLE

General data

Product name	T26 1x58W G13
Technology	Fluorescent
Cap/Base	G13
Housing	Steel
Mount	Ceiling surface mounting

Sylmaster T8 White Louvre - Electronic Ballast

T26 1x58W G13

0055090

Environment	Interior
General application	Education, Hospitality, Office, Retail
ETIM Class	EC002892
Warranty	2 years

Optical data

Fixture luminous flux (lm)	3250
Luminaire efficacy (lm/W)	59
LOR (%)	65
Light colour	N/A
Adjustable chromaticity	N

Electrical data

Total power consumption (W)	55
Mains voltage (V)	220-240V~
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Integral
Transformer required	Yes
Dimmable	No
Glow Wire Test (°C)	960
Nominal Frequency (Hz)	50/60Hz

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Nominal Product Length (mm)	1550
Nominal Product Width (mm)	202
Nominal Product Height (mm)	85
Weight (kg)	5.08

Packaging

Single packaging type	Carton
Product EAN number	5410288550909
Packaging single length / height (cm)	155.0
Packaging single width (cm)	9.0
Packaging single depth (cm)	21.0
DUN14 (outer)	05410288550909
Units per outer package	1
Packaging outer length / height (cm)	155.0
Packaging outer width (cm)	9.0
Packaging outer depth (cm)	21.0

PHOTOMETRY


Sylmaster T8 White Louvre - Electronic Ballast

T26 1x58W G13
0055090

Distance [m]	Cone diameter [m]	Illuminance [lx]
0.5	0.91 1.84	E(0°) 9916 E(C90) 1146 E(C0) 306
1.0	1.81 3.68	E(0°) 1494 E(C90) 296 E(C0) 39
1.5	2.72 5.53	E(0°) 624 E(C90) 127 E(C0) 34
2.0	3.63 7.27	E(0°) 351 E(C90) 72 E(C0) 19
2.5	4.53 9.21	E(0°) 225 E(C90) 46 E(C0) 12
3.0	5.44 11.05	E(0°) 156 E(C90) 32 E(C0) 8

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 123.0°)
— C90 - C270 (Half beam angle: 94.4°)

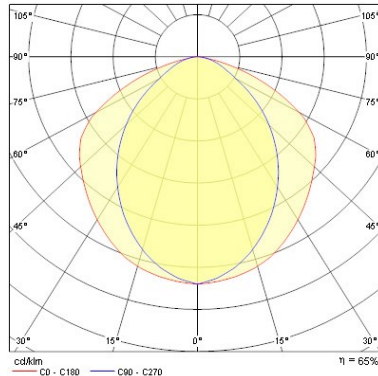

TECHNICAL DRAWINGS

Dimensions (mm)	L	W	H	Weight (kg)	
1x58W	1226	202	85	1800	3.5
1x58W	1100	202	85	1800	5.5
1x58W	1014	202	85	1800	7.0
2x58W	1226	202	85	1800	5.5
2x58W	1100	202	85	1800	6.5
2x58W	1014	202	85	1800	7.0

