

START Panel G4 600x600

START PANEL 600 4000K G4

0047779



Product features

- LED back-lit recessed panel, 4000K Neutral White, 4200lm delivered from 30W, 140lm/W total system efficiency, energy efficient external driver included as standard, even distribution of light throughout fixture, long lifetime of 50,000 hours (L70), size (HxWxD) 596x596x65mm.




PRODUCT OVERVIEW

Product name	START PANEL 600 4000K G4
Technology	LED
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Office
ETIM Class	EC002892
E-number FI	4274181
Warranty	5 years
Fixture luminous flux (lm)	4200
Luminaire efficacy (lm/W)	140
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	107
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	30
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP44/20
IK rating	IK03
Product EAN number	5410288477794

PHOTOMETRY

START Panel G4 600x600 START PANEL 600 4000K G4 0047779

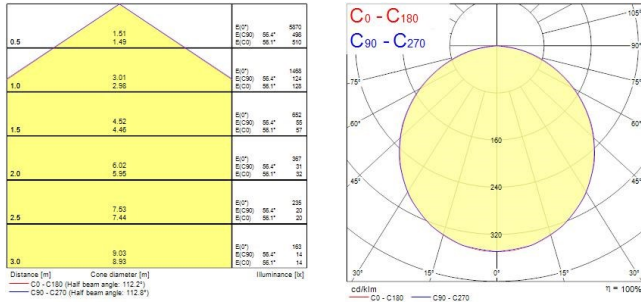

TECHNICAL DRAWINGS

