


HSX Syl-Line

HSXSYL LED NW EB 1720 EM WB

0042293

Product features

- HSX Syl-Line LED, Neutral White, Electronic, 1720mm, Emergency 3 hour maintained, Wide Beam

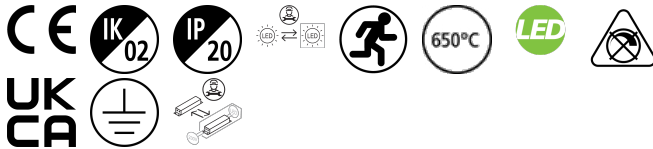

PRODUCT OVERVIEW


Product name	HSXSYL LED NW EB 1720 EM WB
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
Environment	Internal
General application	Logistics & Industry, Retail
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	6660
Luminaire efficacy (lm/W)	88
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Glare control	< 19
Total power consumption (W)	75
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	No
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5410288422930
Luminous flux (emergency) (lm)	972

PHOTOMETRY

HSX Syl-Line HSXSYL LED NW EB 1720 EM WB 0042293


Distance [m]	Cone diameter [m]	E ₀₇	E _{C90}	E _{C0}
0.5	1.46 1.42	9271	338	392
1.0	2.92 2.85	2318	84	97
1.5	4.38 4.27	1030	37	43
2.0	5.84 5.69	373	12	14
2.5	7.30 7.11	211	7	8
3.0	8.76 8.54	128	4	5

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 109.9°)
 — C90 - C270 (Half beam angle: 111.2°)



Distance [m]	Cone diameter [m]	E ₀₇	E _{C90}	E _{C0}
0.5	1.41 1.42	1383	121	131
1.0	2.82 2.85	338	30	32
1.5	4.23 4.27	150	13	14
2.0	5.64 5.69	68	6	6
2.5	7.05 7.11	38	3	3
3.0	8.46 8.54	22	2	2

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 109.9°)
 — C90 - C270 (Half beam angle: 111.4°)



TECHNICAL DRAWINGS

