


SHP-S TwinArc SHP-S 50W TWINARC E27 SLV 0020717

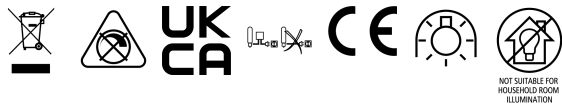

PRODUCT OVERVIEW

Product name	SHP-S 50W TWINARC E27 SLV
Technology	HID
Watt (Rated) (W)	50
Type	SHP-S
Cap/Base	E27
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Logistics & Industry
ETIM Class	EC000821
E-number FI	4845526
E-number SE	8358105
E-number Norway	3800722
Luminous flux (lm)	3600
Colour temperature (K)	2050
CRI (Ra)	20
Colour Variation Initial (SDCM)	N/A
Photobiological Risk Group	Not applicable
Wattage (W)	50
Product Voltage (V)	85
Dimmable	No
Average life (Nominal) (h)	40000
Product EAN number	5410288207179

DATA TABLE

General data

Product name	SHP-S 50W TWINARC E27 SLV
Technology	HID
Watt (Rated) (W)	50
Type	SHP-S
Cap/Base	E27
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Logistics & Industry
ETIM Class	EC000821

SHP-S TwinArc

SHP-S 50W TWINARC E27 SLV

0020717

E-number FI	4845526
E-number SE	8358105
E-number Norway	3800722

Optical data

Luminous flux (lm)	3600
Luminous flux (Rated) (lm)	3600
Ambient temperature for maximum luminous flux (°C)	25
Colour temperature (K)	2050
CRI (Ra)	20
Colour Variation Initial (SDCM)	N/A
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 4000 h 50Hz	96
Rated lumen maint. factor (%) at 6000 h 50Hz	94
Rated lumen maint. factor (%) at 8000 h 50Hz	93
Rated lumen maint. factor (%) at 12000 h 50Hz	91
Rated lumen maint. factor (%) at 16000 h 50Hz	90
Rated lumen maint. factor (%) at 20000 h 50Hz	89

Electrical data

Wattage (W)	50
Current (A)	0.76
Product Voltage (V)	85
Control gear required	Yes
Transformer required	No
Dimmable	No
Lamp Energy Label (class)	G
kWh per 1000 hours burning time	55

Lifetime data

Average life (Nominal) (h)	40000
Average life (Rated) (h)	40000
Life T90	21000
Rated survival factor (%) at 2000 h 50Hz	100
Rated survival factor (%) at 4000 h 50Hz	100
Rated survival factor (%) at 6000 h 50Hz	100
Rated survival factor (%) at 8000 h 50Hz	99
Rated survival factor (%) at 12000 h 50Hz	98
Rated survival factor (%) at 16000 h 50Hz	95
Rated survival factor (%) at 20000 h 50Hz	91

SHP-S TwinArc

SHP-S 50W TWINARC E27 SLV
0020717

Physical data

Nominal Product Length (mm)	165
Nominal Product Diameter (mm)	72
Max. Lamp Diameter (mm) - D	72
Weight (kg)	0.059


Packaging

Single packaging type	Carton
Product EAN number	5410288207179
Packaging single length / height (cm)	16.5
Packaging single width (cm)	7.0
Packaging single depth (cm)	7.0
DUN14 (outer)	15410288207176
Units per outer package	40
Packaging outer length / height (cm)	42.0
Packaging outer width (cm)	35.0
Packaging outer depth (cm)	36.0


Safety data

Lamp mercury content (mg)	11.3
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Suitable for household illumination	No

PHOTOMETRY

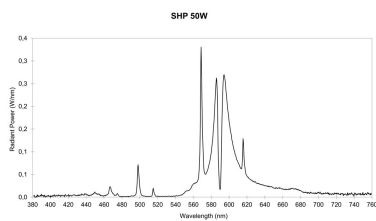

TECHNICAL DRAWINGS



SYLVANIA

SHP-S TwinArc

SHP-S 50W TWINARC E27 SLV

0020717



SYLVANIA

0020717



50
kWh/1000h



2019/2015

SYLVANIA


SHP-S TwinArc

SHP-S 50W TWINARC E27 SLV

0020717



0020717

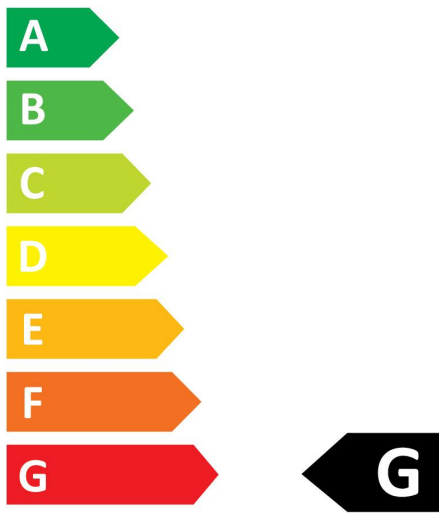

50
kWh/1000h



2019/2015