

START Panel Flat 1200x300


START Panel Flat 1200x300 HE 4300Lm 830

0047220



Product features

- Edge lit LED flat panel. Low Flicker, 35 W, Warm White, 3000 K, 4300 lumens, high efficacy, 123 lm/W, Average lifespan: 120.000Hrs, PMMA opal diffuser, aluminium frame, steel body, electronic non dimmable driver. (HxWxD) 10.8 x 1195 x 295 mm

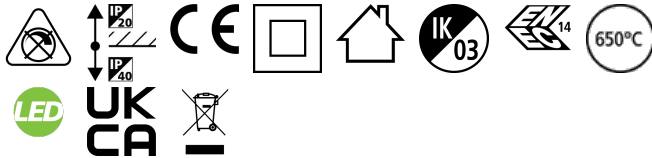


PRODUCT OVERVIEW

Product name	START Panel Flat 1200x300 HE 4300Lm 830
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting, Ceiling surface mounting, Suspended
Environment	Interior
General application	Education, Office
ETIM Class	EC002892
E-number FI	4276941
Warranty	5 years
Fixture luminous flux (lm)	4,150
Luminaire efficacy (lm/W)	119
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	120
Photobiological Risk Group	RG0
Total power consumption (W)	35
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288472201

PHOTOMETRY

START Panel Flat 1200x300

START Panel Flat 1200x300 HE 4300Lm 830
0047220



0.5	1.05 1.51	E(0°) E(30°) E(60°)	505 442 472
1.0	2.09 3.01	E(0°) E(30°) E(60°)	1575 110 110
1.5	4.64 4.92	E(0°) E(30°) E(60°)	612 25 52
2.0	6.18 6.02	E(0°) E(30°) E(60°)	344 25 28
2.5	7.72 7.53	E(0°) E(30°) E(60°)	220 15 15
3.0	9.27 9.03	E(0°) E(30°) E(60°)	153 13 13

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 112.9°)
— C90 - C270 (Half beam angle: 114.2°)

TECHNICAL DRAWINGS

