

SylFlat LED Non Dimmable - Recessed

SYLFLAT 1000 ROUND 3000K
0053289



Product features

- Integrated round recessed 165mm diameter LED downlight providing uniform distribution with an opal diffuser, 110° beam angle, 900LM, 12W, 75lm/W, 3000K, CRI80, non-dimmable, IP20, IK03, 30,000hrs (L70)



PRODUCT OVERVIEW

Product name	SYLFLAT 1000 ROUND 3000K
Technology	LED
Housing	Other
Mount	Ceiling recessed mounting
Environment	Internal
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4274326
E-number SE	7470729
Warranty	3 years
Fixture luminous flux (lm)	900
Luminaire efficacy (lm/W)	75
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	5
Beam Angle (°)	110
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	12
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Integrated
Dimmable	No
Housing colour	White
IP rating	IP20
IK rating	IK03
Product EAN number	5410288532899

SylFlat LED Non Dimmable - Recessed

SYLFLAT 1000 ROUND 3000K
0053289

DATA TABLE

General data

Product name	SYLFLAT 1000 ROUND 3000K
Technology	LED
Housing	Other
Mount	Ceiling recessed mounting
Environment	Internal
General application	Residential & Consumer
Operating temperature range (°C)	-10°C - 40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number FI	4274326
E-number SE	7470729
Warranty	3 years

Optical data

Fixture luminous flux (lm)	900
Luminaire efficacy (lm/W)	75
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	5
Adjustable chromaticity	N
Beam Angle (°)	110
Distribution type	Direct
Glare control	< 28
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	12
Mains voltage (V)	220-240V~
Lamp power factor	0.9
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Integrated
Dimmable	No
Drive current (mA)	105
Inrush Current (A)	4
Inrush Duration (µs)	51
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	13
Max. Luminaires per 16A C Breaker	20

SylFlat LED Non Dimmable - Recessed SYLFLAT 1000 ROUND 3000K 0053289

Lifetime data

Lifespan L70 B50	30000
------------------	-------

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK03
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	165
Nominal Product Width (mm)	165
Nominal Product Height (mm)	27
Nominal Product Diameter (mm)	165
Cutout Dimensions (W x L in mm or Diameter in mm)	150
Max. Lamp Diameter (mm) - D	165
Weight (kg)	0.178
Recessed Depth (mm)	27



Packaging

Single packaging type	Carton
Product EAN number	5410288532899
Packaging single length / height (cm)	23.6
Packaging single width (cm)	6.6
Packaging single depth (cm)	17.7
DUN14 (outer)	15410288532896
Units per outer package	6
Packaging outer length / height (cm)	43.0
Packaging outer width (cm)	25.0
Packaging outer depth (cm)	20.0

Safety data

Optimal operating condition (°C)	-10-40
----------------------------------	--------

PHOTOMETRY

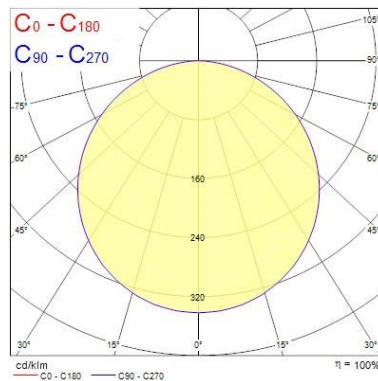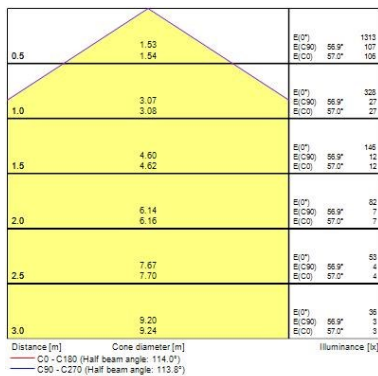

SylFlat LED Non Dimmable - Recessed *SYLFLAT 1000 ROUND 3000K* 0053289

TECHNICAL DRAWINGS

