

Lynx SE

LYNX-SE 11W/830 2G7 SLV 10
0025899



PRODUCT OVERVIEW

Product name	LYNX-SE 11W/830 2G7 SLV 10
Technology	Compact Fluorescent
Watt (Rated) (W)	11
Lamp shape	Other
Type	Lynx SE
Cap/Base	2G7
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000087
E-number FI	4944098
E-number SE	8357281
E-number Norway	3800705
Luminous flux (lm)	900
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	82
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	Not applicable
Wattage (W)	11
Product Voltage (V)	220
Dimmable	No
Average life (Nominal) (h)	12000
Product EAN number	5410288258997

DATA TABLE

General data

Product name	LYNX-SE 11W/830 2G7 SLV 10
Technology	Compact Fluorescent
Watt (Rated) (W)	11
Lamp shape	Other
Type	Lynx SE

Lynx SE

LYNX-SE 11W/830 2G7 SLV 10
0025899

Cap/Base	2G7
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000087
E-number FI	4944098
E-number SE	8357281
E-number Norway	3800705

Optical data

Luminous flux (lm)	900
Luminous flux (Rated) (lm)	900
Rated lamp efficacy 100h 50Hz at 25°C (lm/W)	76
Ambient temperature for maximum luminous flux (°C)	25
Colour temperature (K)	3000
Light colour	Warm White
Colour Code	830
CRI (Ra)	82
Colour Variation Initial (SDCM)	SDCM5
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 2000 h 50Hz	85
Rated lumen maint. factor (%) at 4000 h 50Hz	84
Rated lumen maint. factor (%) at 8000 h 50Hz	81

Electrical data

Wattage (W)	11
Starting time (max) (s)	10 Sec
Current (A)	0.155
Product Voltage (V)	220
Control gear required	Yes
Transformer required	No
Dimmable	No
Lamp Energy Label (class)	G
kWh per 1000 hours burning time	11

Lifetime data

Average life (Nominal) (h)	12000
Average life (Rated) (h)	12000
Rated survival factor (%) at 2000 h 50Hz	96
Rated survival factor (%) at 4000 h 50Hz	90
Rated survival factor (%) at 6000 h 50Hz	80
Rated survival factor (%) at 8000 h 50Hz	72
Rated survival factor (%) at 12000 h 50Hz	62

Lynx SE

LYNX-SE 11W/830 2G7 SLV 10
0025899

Physical data

Nominal Product Length (mm)	220
Nominal Product Diameter (mm)	37
Max. Length base to base (mm) - A	220
Max. Lamp Diameter (mm) - D	13
Weight (kg)	0.037


Packaging

Single packaging type	Carton
Product EAN number	5410288258997
Packaging single length / height (cm)	2.2
Packaging single width (cm)	3.8
Packaging single depth (cm)	24.1
DUN14 (inner)	25410288258991
Units per inner package	10
Packaging inner length / height (cm)	12.4
Packaging inner width (cm)	7.9
Packaging inner depth (cm)	25.6
DUN14 (outer)	15410288258994
Units per outer package	100
Packaging outer length / height (cm)	42.3
Packaging outer width (cm)	27.6
Packaging outer depth (cm)	25.7

Safety data

Lamp mercury content (mg)	2.5
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes

PHOTOMETRY

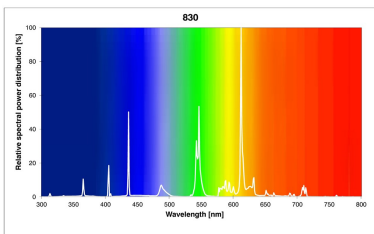


TECHNICAL DRAWINGS



SYLVANIA

Lynx SE
LYNX-SE 11W/830 2G7 SLV 10
0025899

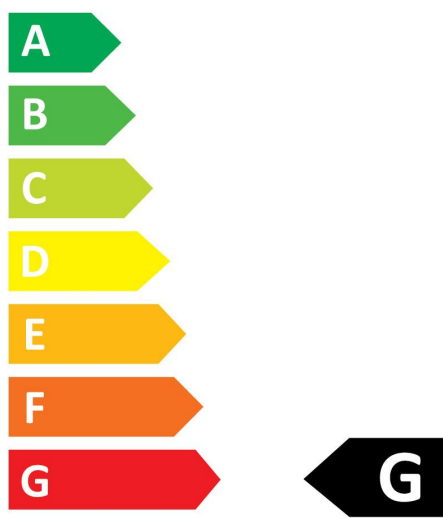

11
kWh/1000h




SYLVANIA

Lynx SE
LYNX-SE 11W/830 2G7 SLV 10
0025899



0025899

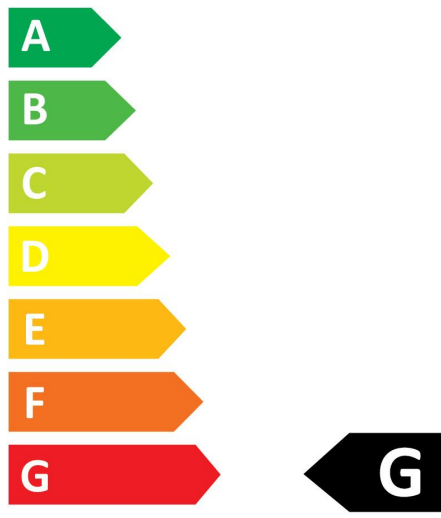

11
kWh/1000h



2019/2015