

## Start Track Spot Large

START Track Spot L 4450lm 930 MB WHT

0004869



### Product features

- Integrated LED spotlight, Textured White - RAL9016, compact and minimalist design, ideal for retail applications, die-cast aluminium body, passive cooling heatsink. Beam angle: 38°, color temperature: 3000K, total system power: 55W, total fixture output: 4448 lm, LOR: 100%, colour rendering: Ra: 90 typical, LED Chromaticity: 3 step MacAdam ellipse, lifetime: >50000 hours at L70B50, energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 1400mA, electronic driver, non-dimmable, power factor: 0.96, electrical protection: Class II, Global Track 3 Phase adapter suitable for Global trac 3-circuit tracks, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø113x164x240, weight: 1.398kg.




### PRODUCT OVERVIEW

Product name	START Track Spot L 4450lm 930 MB WHT
Technology	LED
Housing	Aluminium
Mount	Track mounting
General application	Retail
ETIM Class	EC001744
E-number FI	4274280
E-number SE	7401810
Warranty	5 years
Fixture luminous flux (lm)	4448
Luminaire efficacy (lm/W)	81
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	38
Photobiological Risk Group	RG1
Total power consumption (W)	55
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Integral
Dimmable	No
LED Flickering Rate	Medium (21% - 40%)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK02
Product EAN number	5410288048697

Start Track Spot Large  
START Track Spot L 4450lm 930 MB WHT  
0004869

PHOTOMETRY

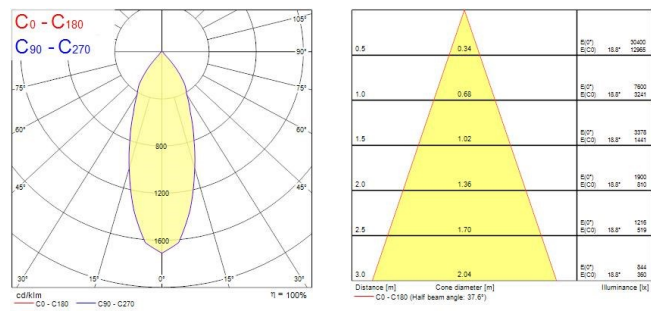

TECHNICAL DRAWINGS

