


Sterling Bulkhead - LED

Sterling Bulkhead 4000K Emergency Silver
4054997



Product features

- Sterling LED Bulkhead

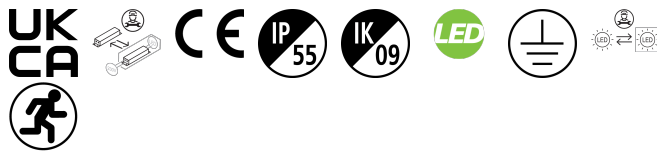

PRODUCT OVERVIEW

Product name	Sterling Bulkhead 4000K Emergency Silver
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Environment	Exterior Interior
General application	Education, Hospitality, Logistics & Industry, Office
ETIM Class	EC002892
Warranty	5 years
Colour temperature (K)	4000
Light colour	Neutral White
Photobiological Risk Group	RG1
Total power consumption (W)	11
Electrical protection	Class I
Control gear mounting	Integral
Housing colour	Silver
IP rating	IP55
IK rating	IK09
Product EAN number	5026524549974

DATA TABLE

General data

Product name	Sterling Bulkhead 4000K Emergency Silver
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Environment	Exterior Interior
General application	Education, Hospitality, Logistics & Industry, Office
ETIM Class	EC002892
Warranty	5 years

Sterling Bulkhead - LED

Sterling Bulkhead 4000K Emergency Silver
4054997

Optical data

Colour temperature (K)	4000
Light colour	Neutral White
Adjustable chromaticity	N
Distribution type	Symmetric
Photobiological Risk Group	RG1
Emergency duration (h)	3

Electrical data

Total power consumption (W)	11
Mains voltage (V)	230V~
Electrical protection	Class I
Control gear mounting	Integral
Transformer required	Yes
Drive current (mA)	350
Nominal Frequency (Hz)	50/60Hz

Physical data

Housing colour	Silver
IP rating	IP55
IK rating	IK09
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	White
Nominal Product Width (mm)	350
Nominal Product Height (mm)	128
Max. Lamp Diameter (mm) - D	350
Weight (kg)	3.6

Packaging

Single packaging type	Carton
Product EAN number	5026524549974
Packaging single length / height (cm)	36.0
Packaging single width (cm)	36.0
Packaging single depth (cm)	13.5
DUN14 (outer)	5026524549974
Units per outer package	1
Packaging outer length / height (cm)	36.0
Packaging outer width (cm)	36.0
Packaging outer depth (cm)	13.5

PHOTOMETRY


Sterling Bulkhead - LED

Sterling Bulkhead 4000K Emergency Silver
4054997

0.5	1.59	E(0°) E(C0)	57.8°	209 15
1.0	3.18	E(0°) E(C0)	57.8°	52 4
1.5	4.76	E(0°) E(C0)	57.8°	23 2
2.0	6.35	E(0°) E(C0)	57.8°	15 1
2.5	7.94	E(0°) E(C0)	57.8°	8 1
3.0	9.53	E(0°) E(C0)	57.8°	6 0

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 115.6°)

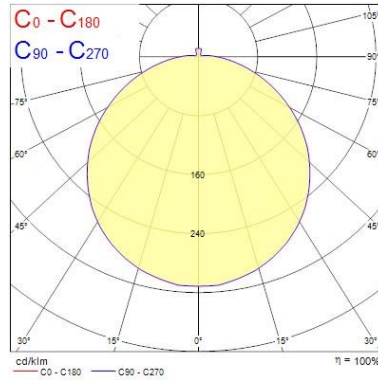

TECHNICAL DRAWINGS

