

## T5 FHO Luxline Plus

80W/T5/865 FHO  
0002786



### Product features



## PRODUCT OVERVIEW

Product name	80W/T5/865 FHO
Technology	Fluorescent
Watt (Rated) (W)	80
Lamp shape	Tube, double-ended
Type	T5 FHO Luxline Plus
Cap/Base	G5
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number FI	4944509
E-number SE	8356566
E-number Norway	3843430
Luminous flux (lm)	6000
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	78
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	Not applicable
Wattage (W)	80.00
Product Voltage (V)	152
Dimmable	Yes
Average life (Nominal) (h)	24000
Product EAN number	5410288027869

## DATA TABLE

### General data

Product name	80W/T5/865 FHO
Technology	Fluorescent
Watt (Rated) (W)	80
Lamp shape	Tube, double-ended
Type	T5 FHO Luxline Plus

## T5 FHO Luxline Plus

80W/T5/865 FHO  
0002786

Cap/Base	G5
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number FI	4944509
E-number SE	8356566
E-number Norway	3843430

### Optical data

Luminous flux (lm)	6000
Luminous flux (Rated) (lm)	6000
Luminous flux (Nominal) at 35°C (lm)	6650
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	78
Ambient temperature for maximum luminous flux (°C)	35
Colour temperature (K)	6500
Light colour	Daylight
Colour Code	865
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM5
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 2000 h 50Hz	0.97
Rated lumen maint. factor (%) at 4000 h 50Hz	0.95
Rated lumen maint. factor (%) at 6000 h 50Hz	0.93
Rated lumen maint. factor (%) at 8000 h 50Hz	0.92
Rated lumen maint. factor (%) at 12000 h 50Hz	0.91
Rated lumen maint. factor (%) at 16000 h 50Hz	0.90
Rated lumen maint. factor (%) at 20000 h 50Hz	0.88

### Electrical data

Wattage (W)	80.00
Watt (Rated) - High frequency (W)	76.80
Current (A)	0.530
Product Voltage (V)	152
Control gear required	Yes
Transformer required	No
Dimmable	Yes
Drive current (mA)	530
Lamp Energy Label (class)	G
kWh per 1000 hours burning time	85

## T5 FHO Luxline Plus

80W/T5/865 FHO  
0002786

### Lifetime data

Average life (Nominal) (h)	24000
Average life (Rated) (h)	24000
Rated survival factor (%) at 2000 h 50Hz	0.99
Rated survival factor (%) at 4000 h 50Hz	0.98
Rated survival factor (%) at 6000 h 50Hz	0.96
Rated survival factor (%) at 8000 h 50Hz	0.94
Rated survival factor (%) at 12000 h 50Hz	0.93
Rated survival factor (%) at 16000 h 50Hz	0.90
Rated survival factor (%) at 20000 h 50Hz	0.84

### Physical data

Nominal Product Length (mm)	1450.0
Nominal Product Diameter (mm)	16
Max. Length base to base (mm) - A	1449.0
Length base to pin Min-Max (mm) - B	1453.7-1456.1
Max. Lamp Length (mm) - C/L	1463.2
Max. Lamp Diameter (mm) - D	17.0
Weight (kg)	0.109

### Packaging


Single packaging type	Carton
Product EAN number	5410288027869
Packaging single length / height (cm)	146.4
Packaging single width (cm)	1.9
Packaging single depth (cm)	1.9
DUN14 (outer)	15410288027866
Units per outer package	25
Packaging outer length / height (cm)	148.0
Packaging outer width (cm)	10.5
Packaging outer depth (cm)	10.5

### Safety data

Lamp mercury content (mg)	2.30
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Suitable for household illumination	Yes

## PHOTOMETRY

T5 FHO Luxline Plus  
80W/T5/865 FHO  
0002786

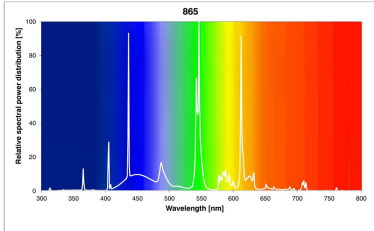

## TECHNICAL DRAWINGS



0002786



**80**  
kWh/1000h




2019/2015

# SYLVANIA

T5 FHO Luxline Plus  
80W/T5/865 FHO  
0002786



0002786

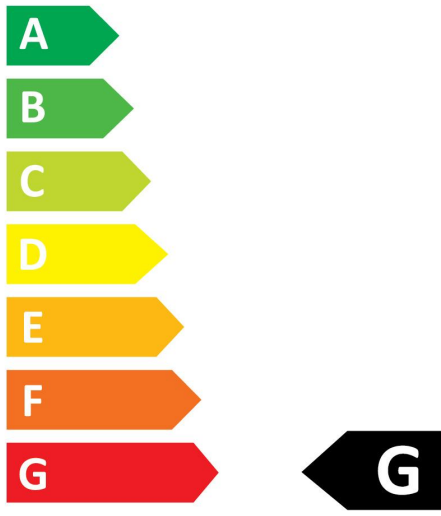

**80**  
kWh/1000h



2019/2015