### Beacon LED Muse Tune

### Beacon Muse Tune 90CRI On-board DIM White L3 2059767



#### **Product features**

Integrated LED spotlight, White - RAL9016 unique soft-touch ring, adjustable beam angle from a 10° spot to a 40° flood, compact and minimalist design, ideal for retail, display, museum and gallery applications, die-cast aluminium body, passive cooling heatsink. Beam angle: 10° spot to 40° flood,color temperature: 2100-4300K Tuneable white , total system power: 21W, total fixture output: 71/134 lm, LOR: 100%, colour rendering: CRI: 93 typical, LED Chromaticity: 3 step MacAdam ellipse, lifetime: >70000 hours at L70B50, energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, electronic driver, dimmable and tuneable via onboard potentiometer, power factor: 0.9, electrical protection: Class II, Lytespan 3 - The Circuit Adaptor suitable for Concord Lytespan 3-75°k, nigress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø80x140x216mm, weight:


















#### PRODUCT OVERVIEW

Product name	Beacon Muse Tune 90CRI On-board DIM White L3
Technology	LED
Housing	Aluminium
Mount	Track mounting
General application	Hospitality, Museums & Galleries
ETIM Class	EC001744
Warranty	5 years
Fixture luminous flux (Im)	71/134
LOR (%)	100
Light colour	Tuneable White
CRI (Ra)	90
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG0
Total power consumption (W)	21
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Integral
Dimmable	Yes
Minimum dimming level (%)	1
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK02
Product EAN number	5025768597673

#### **PHOTOMETRY**

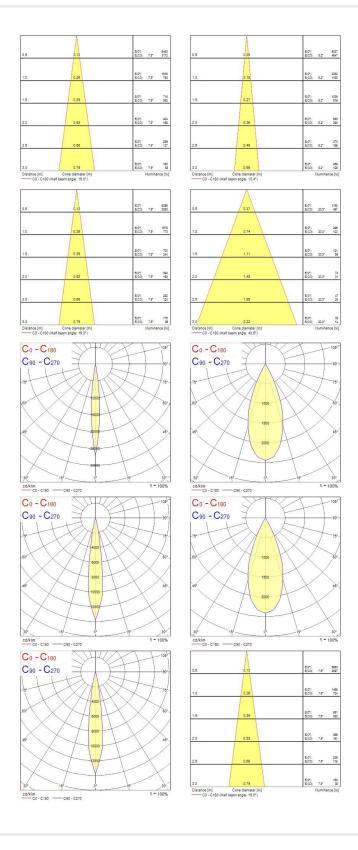

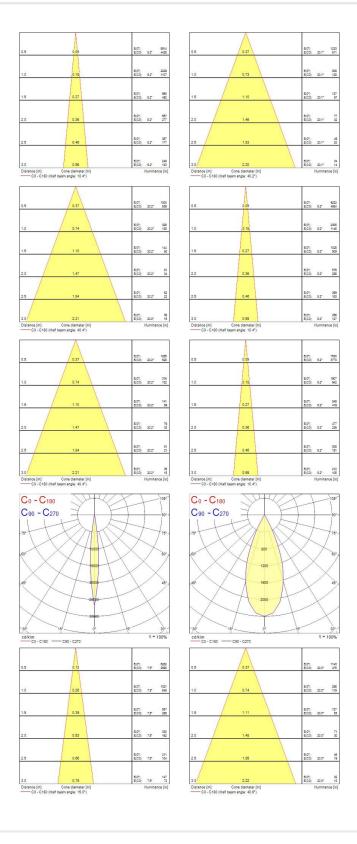

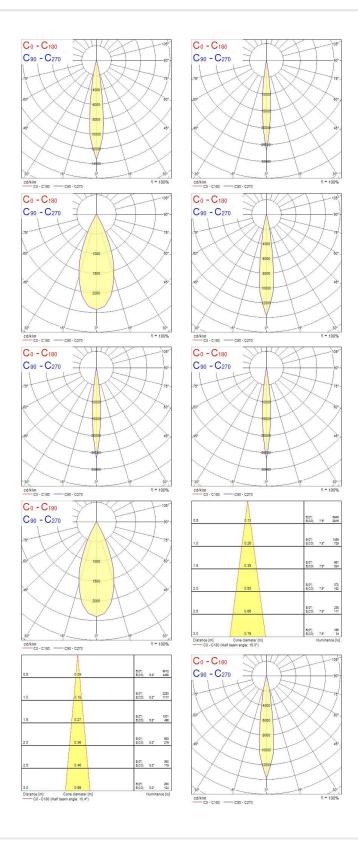



#### **TECHNICAL DRAWINGS**



