

Insaver LED II 150

Insaver LED II 150 High Output NW EB

3098115



Product features

- Circular LED downlight with up to 114lm/W efficacy and 2,400 luminaire lumen output. Innovative easy installation system allows for a rapid, single point installation. For 150mm cut outs. IP44 or UGR<19 compliant with additional accessories. 3 hour emergency and surface mounted versions available. Plus3 version includes Wieland GST connector.



PRODUCT OVERVIEW

Product name	Insaver LED II 150 High Output NW EB
Technology	LED
Housing	AGC (advanced graphite composite)
Mount	Ceiling recessed mounting
Environment	Internal
General application	Office
ETIM Class	EC001744
E-number FI	4271292
E-number SE	7464708
Warranty	5 years
Fixture luminous flux (lm)	2400
Luminaire efficacy (lm/W)	109
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	76
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	22
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	No
Housing colour	White
IP rating	IP23
IK rating	IK02
Product EAN number	8711971981152

DATA TABLE

General data

Product name	Insaver LED II 150 High Output NW EB
Technology	LED

Insaver LED II 150

Insaver LED II 150 High Output NW EB

3098115

Housing	AGC (advanced graphite composite)
Mount	Ceiling recessed mounting
Environment	Internal
General application	Office
Operating temperature range (°C)	0°C - 25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number FI	4271292
E-number SE	7464708
Warranty	5 years

Optical data

Fixture luminous flux (lm)	2400
Luminaire efficacy (lm/W)	109
LOR (%)	100
Colour temperature (K)	4000
CRI (Ra)	80
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	76
Distribution type	Symmetric
Glare control	< 19
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	22
Mains voltage (V)	220-240V~
Electrical protection	Class II
Control gear type	Electronic ballast
Transformer required	Yes
Dimmable	No
Drive current (mA)	900
Inrush Current (A)	45
Inrush Duration (µs)	20
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	C
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	50
Max. Luminaires per 13A C Breaker	65
Max. Luminaires per 16A C Breaker	80
Max. Luminaires per 20A C Breaker	100
Max. Luminaires per 10A B Breaker	30
Max. Luminaires per 13A B Breaker	39
Max. Luminaires per 16A B Breaker	48
Max. Luminaires per 20A B Breaker	60

Lifetime data

Lifespan L70 B50	100000
------------------	--------

Insaver LED II 150

Insaver LED II 150 High Output NW EB

3098115

Lifespan L80 B20	100000
Lifespan L90 B10	46000

Physical data

Housing colour	White
IP rating	IP23
IK rating	IK02
Reflector finish	High-gloss
Nominal Product Length (mm)	169
Nominal Product Width (mm)	169
Nominal Product Height (mm)	87
Cutout Dimensions (W x L in mm or Diameter in mm)	150
Weight (kg)	0.662



Packaging

Single packaging type	Carton
Product EAN number	8711971981152
Packaging single length / height (cm)	25.4
Packaging single width (cm)	22.8
Packaging single depth (cm)	11.7
DUN14 (outer)	08711971981152
Units per outer package	1
Packaging outer length / height (cm)	25.4
Packaging outer width (cm)	22.8
Packaging outer depth (cm)	11.7


Safety data

Optimal operating condition (°C)	0-25
----------------------------------	------

PHOTOMETRY

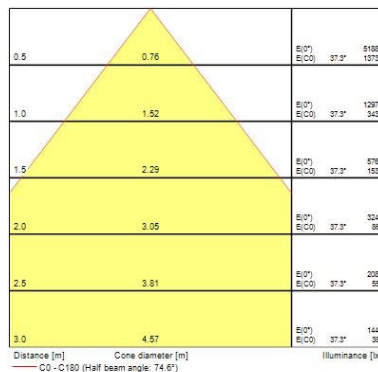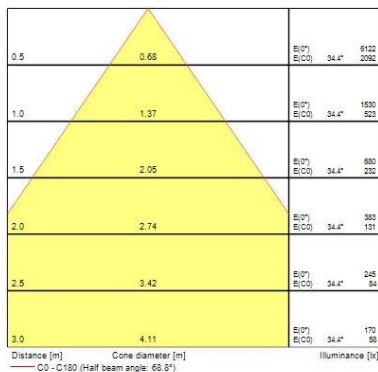


Insaver LED II 150 Insaver LED II 150 High Output NW EB 3098115

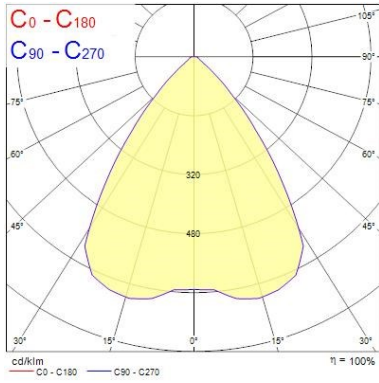



0.5	0.77	E(0°) E(C0)	4986 1320
1.0	1.53	E(0°) E(C0)	1224 330
1.5	2.30	E(0°) E(C0)	544 147
2.0	3.07	E(0°) E(C0)	306 82
2.5	3.84	E(0°) E(C0)	196 53
3.0	4.60	E(0°) E(C0)	136 37

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 75.0°)

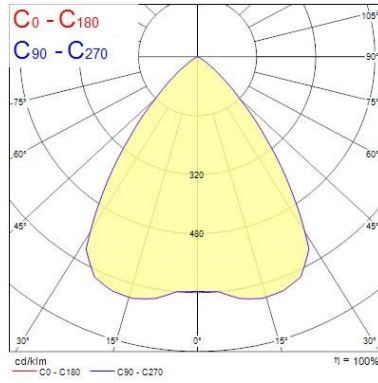

0.5	0.79	E(0°) E(C0)	6110 1575
1.0	1.58	E(0°) E(C0)	1527 394
1.5	2.37	E(0°) E(C0)	679 175
2.0	3.16	E(0°) E(C0)	362 96
2.5	3.95	E(0°) E(C0)	244 63
3.0	4.74	E(0°) E(C0)	170 44

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 76.6°)

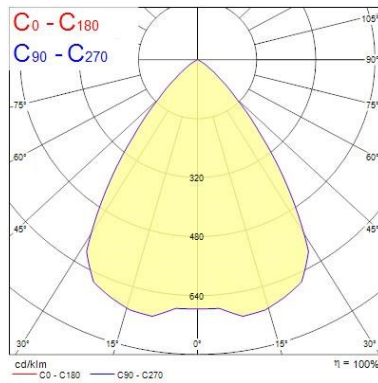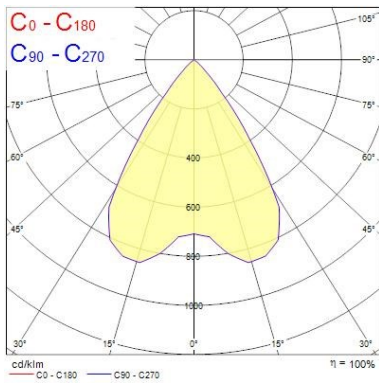

TECHNICAL DRAWINGS

