

## Start eco Spot IP44


START ECO SPOT 420lm 830 IP44 DIM WHT

0005376



### Product features

- Integrated LED recessed spotlight, vertical tilt 30°, RAL9016 colour, 420lm, 5.5W, phase dimmable trailing/leading edge, 3000K, 38° degree beam angle, polycarbonate white body, low profile 47mm recessed depth, IP44 from the front, IK03, loop-in/loop-out terminals for fast wiring, 86mm bezel diameter, 68-74mm cutout, clear lens. Additional silver bezel included in the packaging.


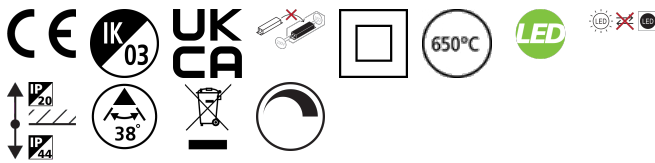


## PRODUCT OVERVIEW

Product name	START ECO SPOT 420lm 830 IP44 DIM WHT
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Residential & Consumer
ETIM Class	EC001744
Warranty	3 years
Fixture luminous flux (lm)	420
Luminaire efficacy (lm/W)	76
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	38
Photobiological Risk Group	RG0
Total power consumption (W)	5.5
Electrical protection	Class II
Dimmable	Yes
Minimum dimming level (%)	10
LED Flickering Rate	Medium (21% - 40%)
Housing colour	White
IP rating	IP44/20
IK rating	IK03
Product EAN number	5410288053769

## PHOTOMETRY

## Start eco Spot IP44 *START ECO SPOT 420lm 830 IP44 DIM WHT* 0005376

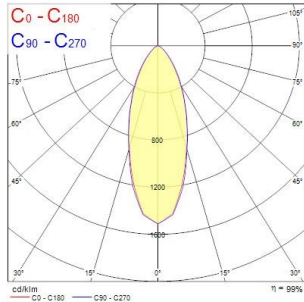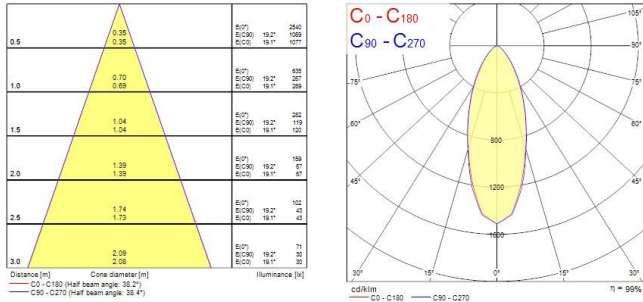

## TECHNICAL DRAWINGS

