

## T8 Luxline Plus

F70W/T8/865  
0001095



### Product features

- T8 6500K fluorescent lamps



## PRODUCT OVERVIEW

Product name	F70W/T8/865
Technology	Fluorescent
Watt (Rated) (W)	69.50
Lamp shape	Tube, double-ended
Type	T8 Luxline Plus
Cap/Base	G13
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Residential & Consumer, Retail
ETIM Class	EC000108
E-number FI	4940247
Luminous flux (lm)	5800
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	Not applicable
Wattage (W)	70.00
Product Voltage (V)	128
Dimmable	Yes
Average life (Nominal) (h)	20000
Product EAN number	5410288010953

## DATA TABLE

### General data

Product name	F70W/T8/865
Technology	Fluorescent
Watt (Rated) (W)	69.50
Lamp shape	Tube, double-ended
Type	T8 Luxline Plus
Cap/Base	G13
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Residential & Consumer, Retail

## T8 Luxline Plus

F70W/T8/865

0001095

ETIM Class	EC000108
E-number FI	4940247

### Optical data

Luminous flux (lm)	5800
Luminous flux (Rated) (lm)	5800
Ambient temperature for maximum luminous flux (°C)	25
Colour temperature (K)	6500
Light colour	Daylight
Colour Code	865
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM5
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 2000 h 50Hz	0.96
Rated lumen maint. factor (%) at 4000 h 50Hz	0.94
Rated lumen maint. factor (%) at 6000 h 50Hz	0.92
Rated lumen maint. factor (%) at 8000 h 50Hz	0.91
Rated lumen maint. factor (%) at 12000 h 50Hz	0.90
Rated lumen maint. factor (%) at 16000 h 50Hz	0.89
Rated lumen maint. factor (%) at 20000 h 50Hz	0.87

### Electrical data

Wattage (W)	70.00
Watt (Rated) - High frequency (W)	60.00
Current (A)	0.700
Mains voltage (V)	220-240V~
Product Voltage (V)	128
Control gear required	Yes
Transformer required	No
Dimmable	Yes
Drive current (mA)	700
Lamp Energy Label (class)	G
kWh per 1000 hours burning time	81

### Lifetime data

Average life (Nominal) (h)	20000
Average life (Rated) (h)	20000
Rated survival factor (%) at 2000 h 50Hz	0.99
Rated survival factor (%) at 4000 h 50Hz	0.98
Rated survival factor (%) at 6000 h 50Hz	0.96
Rated survival factor (%) at 8000 h 50Hz	0.94

## T8 Luxline Plus

F70W/T8/865  
0001095

Rated survival factor (%) at 12000 h 50Hz	0.92
Rated survival factor (%) at 16000 h 50Hz	0.80
Rated survival factor (%) at 20000 h 50Hz	0.50

### Physical data

Nominal Product Length (mm)	1800.0
Nominal Product Diameter (mm)	26
Max. Length base to base (mm) - A	1763.8
Length base to pin Min-Max (mm) - B	1768.5-1770.9
Max. Lamp Length (mm) - C/L	1778.0
Max. Lamp Diameter (mm) - D	28.0
Weight (kg)	0.238


### Packaging

Single packaging type	Carton
Product EAN number	5410288010953
Packaging single length / height (cm)	177.8
Packaging single width (cm)	2.9
Packaging single depth (cm)	2.8
DUN14 (outer)	15410288010950
Units per outer package	25
Packaging outer length / height (cm)	180.5
Packaging outer width (cm)	15.5
Packaging outer depth (cm)	15.0

### Safety data

Lamp mercury content (mg)	2.80
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Suitable for household illumination	Yes


## PHOTOMETRY

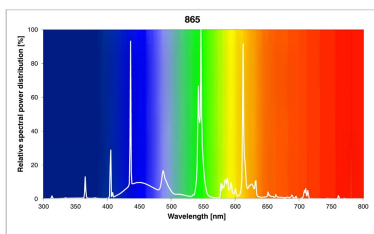


## TECHNICAL DRAWINGS

# SYLVANIA

T8 Luxline Plus  
F70W/T8/865  
0001095



0001095

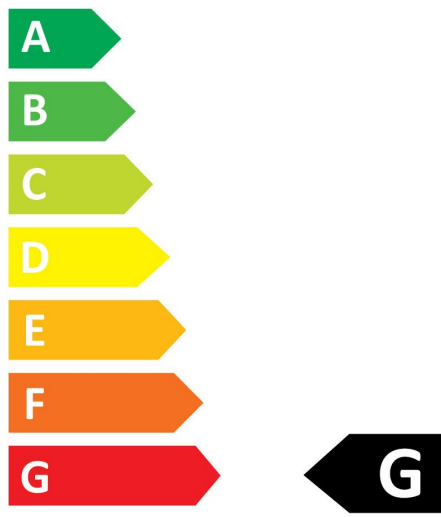

**70**  
kWh/1000h




2019/2015

# SYLVANIA

T8 Luxline Plus  
F70W/T8/865  
0001095



0001095

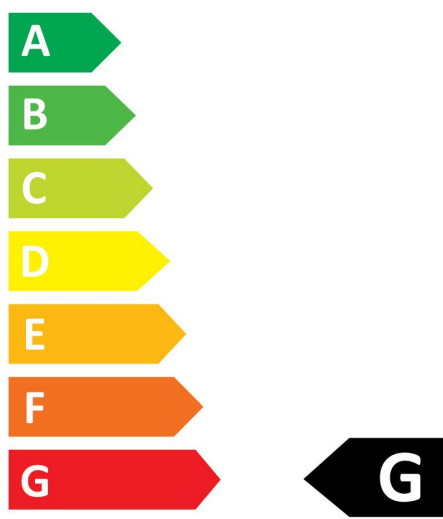

**70**  
kWh/1000h



2019/2015