

## Granit 0-10V

Granit IP65 0-10V 13000lm 840 MB

0039592

### Product features

- Integrated LED highbay; Black aluminium housing; 13000Lm; 90 W; 144 Lm/W; 4000K; Drive current: 780mA; CRI 80; 55° beam angle; 0-10V dimmable; IP65; IK08; Lifespan L80:B50 90,000 hrs; (D x H) 308 x 166 mm; 1.5 m mains cable; 1.5 m control cable; 1.2 m chain length including hooks.



### PRODUCT OVERVIEW

Product name	Granit IP65 0-10V 13000lm 840 MB
Technology	LED
Housing	Aluminium
Mount	Suspended
General application	Logistics & Industry
ETIM Class	EC001716
E-number FI	4357002
Warranty	5 years
Fixture luminous flux (lm)	13000
Luminaire efficacy (lm/W)	144
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	55
Glare control	< 22
Photobiological Risk Group	RG1
Total power consumption (W)	90
Electrical protection	Class I
Control gear type	Other
Dimmable	Yes
LED Flickering Rate	Low (6% - 20%)
Housing colour	Black
IP rating	IP65
IK rating	IK08
Product EAN number	5410288395920

## Granit 0-10V

Granit IP65 0-10V 13000lm 840 MB

0039592

### DATA TABLE

#### General data

Product name	Granit IP65 0-10V 13000lm 840 MB
Technology	LED
Housing	Aluminium
Mount	Suspended
General application	Logistics & Industry
Operating temperature range (°C)	-30°C - 50°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001716
E-number FI	4357002
Warranty	5 years

#### Optical data

Fixture luminous flux (lm)	13000
Luminaire efficacy (lm/W)	144
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	55
Glare control	< 22
Photobiological Risk Group	RG1

#### Electrical data

Total power consumption (W)	90
Mains voltage (V)	220-240V~
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	10
Electrical protection	Class I
Control gear type	Other
Dimmable	Yes
Drive current (mA)	780
Inrush Current (A)	56.6
Inrush Duration (µs)	140
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. Luminaires per 10A C Breaker	12
Max. Luminaires per 13A C Breaker	15
Max. Luminaires per 16A C Breaker	20
Max. Luminaires per 20A C Breaker	24
Max. Luminaires per 10A B Breaker	7
Max. Luminaires per 13A B Breaker	9

## Granit 0-10V

Granit IP65 0-10V 13000lm 840 MB

0039592

Max. Luminaires per 16A B Breaker	12
Max. Luminaires per 20A B Breaker	14

### Lifetime data

Lifespan L80 B50	90000
Lifespan L80 B20	70000
Lifespan L80 B10	65000
Lifespan L90 B50	45000

### Physical data

Housing colour	Black
IP rating	IP65
IK rating	IK08
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	308
Nominal Product Width (mm)	308
Nominal Product Height (mm)	166
Nominal Product Diameter (mm)	308
Weight (kg)	2.43

### Packaging

Single packaging type	Carton
Product EAN number	5410288395920
Packaging single length / height (cm)	37.0
Packaging single width (cm)	37.0
Packaging single depth (cm)	18.0
DUN14 (outer)	05410288395920
Units per outer package	1
Packaging outer length / height (cm)	37.0
Packaging outer width (cm)	37.0
Packaging outer depth (cm)	18.0









### Safety data

Optimal operating condition (°C)	-30-50
----------------------------------	--------

## PHOTOMETRY

## Granit 0-10V

Granit IP65 0-10V 13000lm 840 MB  
0039592

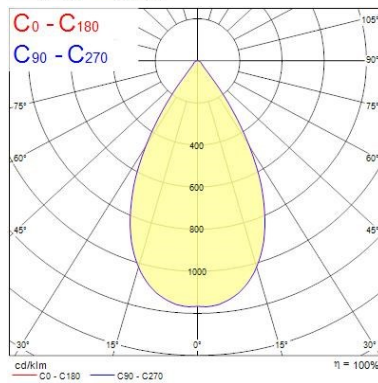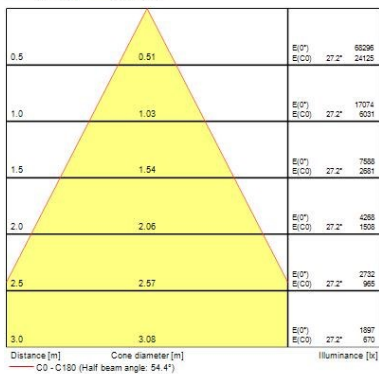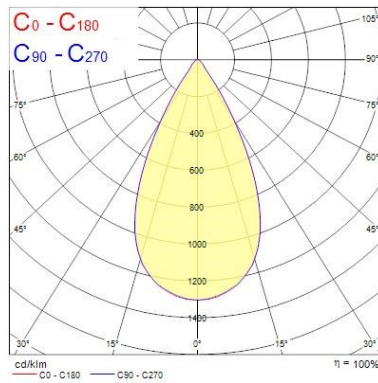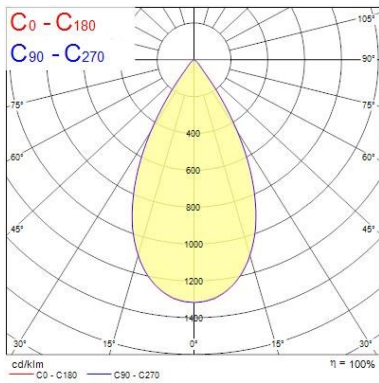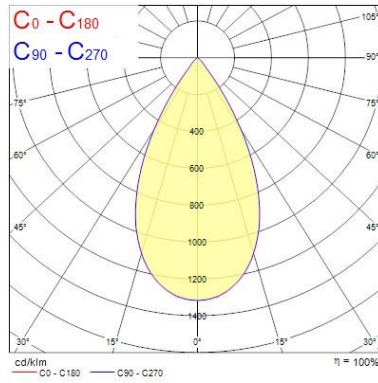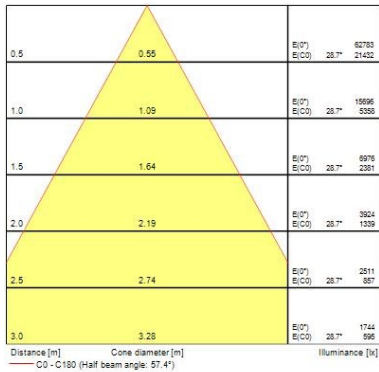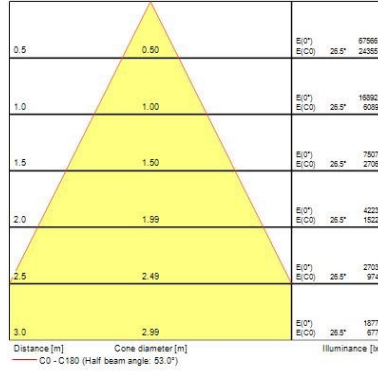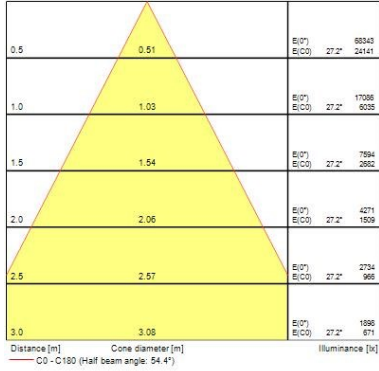

## Granit 0-10V

*Granit IP65 0-10V 13000lm 840 MB*

0039592

### TECHNICAL DRAWINGS

---

