

CurveLyte


CURVELYTE 1265x330 HO LG D/I 4K DALI BLACK

2093187



Product features

- CURVELYTE 1265x330 HO LG D/I 4K DALI BLACK is a suspended LED Linear luminaire with Direct / Indirect (70/30) distribution, with low glare filter (UGR=19). Luminaire Dimensions: 1265x336x46mm, Black body colour, IP20, IK06. Constant Current, Low LED flicker (<5%), Neutral White (4000K) LED Colour Temperature, 5450lm, 55W, 99lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, Lifespan 49,000 hours L80B20, Terminal block connection in the driver box. Glow Wire Test 650°C.

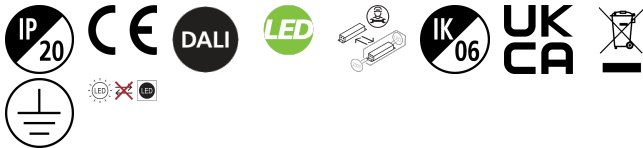

PRODUCT OVERVIEW

Product name	CURVELYTE 1265x330 HO LG D/I 4K DALI BLACK
Technology	LED
General application	Education, Hospitality, Office
ETIM Class	EC001743
E-number FI	4260867
E-number SE	7505165
Warranty	5 years
Fixture luminous flux (lm)	5450
Luminaire efficacy (lm/W)	99
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	55
Electrical protection	Class I
Housing colour	Black
IP rating	IP20
IK rating	IK06
Product EAN number	5025768931873

PHOTOMETRY


CurveLyte

CURVELYTE 1265x330 HO LG D/I 4K DALI BLACK
2093187

0.5	1.52	E:0°	4417
	1.70	E:C90	2671
		E:C0	281
1.0	3.04	E:0°	1109
	3.40	E:C90	62
		E:C0	73
1.5	4.57	E:0°	492
	5.09	E:C90	41
		E:C0	32
2.0	6.09	E:0°	277
	6.75	E:C90	23
		E:C0	15
2.5	7.61	E:0°	177
	8.49	E:C90	15
		E:C0	7
3.0	9.13	E:0°	123
	10.19	E:C90	10
		E:C0	8

Distance [m] Core diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 113.4°)
— C90 - C270 (Half beam angle: 113.4°)



TECHNICAL DRAWINGS

