

## START Panel Flat 1200x300

START Panel Flat 1200x300 HE 4300Lm 840

0047221



### Product features

- Edge lit LED flat panel. Low Flicker, 35 W, Neutral White, 4000 K, 4300 lumens, high efficacy, 123 lm/W, Average lifespan: 120.000Hrs, PMMA opal diffuser, aluminium frame, steel body, electronic non dimmable driver. (HxWxD) 10.8 x 1195 x 295 mm




## PRODUCT OVERVIEW

Product name	START Panel Flat 1200x300 HE 4300Lm 840
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting, Ceiling surface mounting, Suspended
Environment	Interior
General application	Education, Office
ETIM Class	EC002892
E-number FI	4276942
Warranty	5 years
Fixture luminous flux (lm)	4,250
Luminaire efficacy (lm/W)	121
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	120
Photobiological Risk Group	RG0
Total power consumption (W)	35
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288472218

## PHOTOMETRY

START Panel Flat 1200x300  
START Panel Flat 1200x300 HE 4300Lm 840  
0047221

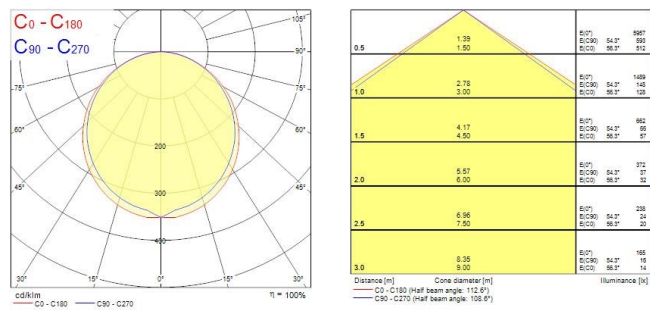

TECHNICAL DRAWINGS

