


Start Surface IP66 Ø350mm

START SURFACE IP66 2500LM 840 IK10 WHT
0049017



Product features

- LED exterior surface mounted luminaire, 350mm diameter, 2500lm as max. lumen output, can be adjusted down to 1800lm by internal switch, 24W power consumption, 104lm/W efficacy, 4000K color temperature, CRI80, non-dimmable, IP66, IK10, 50,000 hours (L70), whitehousing, vandal resistant





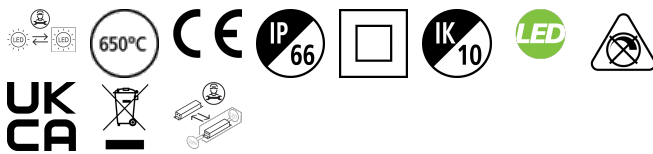


PRODUCT OVERVIEW

Product name	START SURFACE IP66 2500LM 840 IK10 WHT
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Environment	Indoor, Outdoor
General application	Hospitality
ETIM Class	EC002892
E-number FI	4579483
Warranty	5 years
Fixture luminous flux (lm)	2500
Luminaire efficacy (lm/W)	104
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	120
Photobiological Risk Group	RG0
Total power consumption (W)	24
Electrical protection	Class II
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP66
IK rating	IK10
Product EAN number	5410288490175

PHOTOMETRY

Start Surface IP66 Ø350mm START SURFACE IP66 2500LM 840 IK10 WHT 0049017



TECHNICAL DRAWINGS

