


## Sylproof Tubular - Electronic

*Sylproof Tubular IP66 249 EB 830 RAP*  
0042430

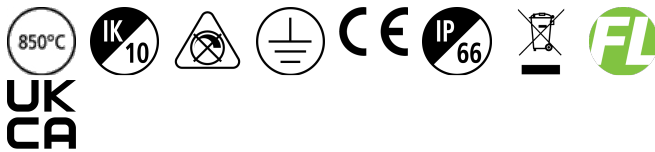


### PRODUCT OVERVIEW

Product name	Sylproof Tubular IP66 249 EB 830 RAP
Technology	Fluorescent
Cap/Base	G5
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
Environment	Interior
General application	Hospitality, Logistics & Industry
ETIM Class	EC000109
Fixture luminous flux (lm)	6245
Luminaire efficacy (lm/W)	72
LOR (%)	75
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	85
Total power consumption (W)	87
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	No
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP66
IK rating	IK10
Product EAN number	5410288424309
Light source included	0002778

### PHOTOMETRY

## Sylproof Tubular - Electronic

*Sylproof Tubular IP66 249 EB 830 RAP*  
0042430

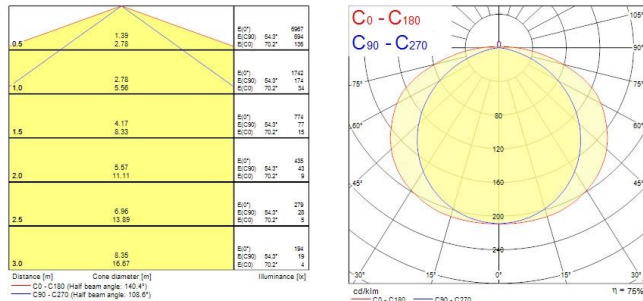

## TECHNICAL DRAWINGS

