

## Sylproof Tubular LED - Microwave sensor DALI

*Sylproof Tubular LED 2X1200 DALI MW WW*  
0047632



### Product features

- Aesthetically attractive and highly efficient LED tubular luminaire, opaque acrylic diffuser, stainless steel end caps and mounting brackets, rapid connector, as Sylvania Sylproof Tubular LED




### PRODUCT OVERVIEW

Product name	Sylproof Tubular LED 2X1200 DALI MW WW
Technology	LED
Cap/Base	N/A
Housing	Acrylic PMMA
Mount	Ceiling surface mounting
Environment	Interior
General application	Logistics & Industry
ETIM Class	EC000109
Warranty	5 years
Fixture luminous flux (lm)	4100
Luminous flux (lm)	4100
Luminaire efficacy (lm/W)	105.12
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG0
Total power consumption (W)	39
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	90
Housing colour	Transparent
IP rating	IP66
IK rating	IK06
Product EAN number	5410288476322

### PHOTOMETRY

Sylproof Tubular LED - Microwave sensor DALI  
Sylproof Tubular LED 2X1200 DALI MW WW  
0047632

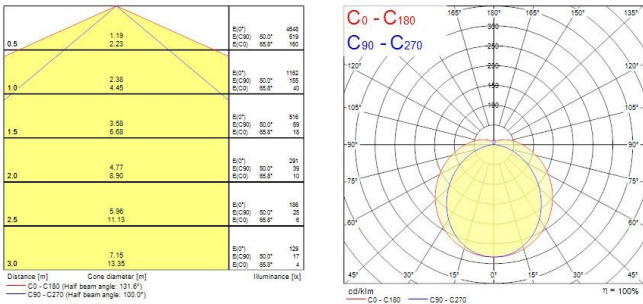

TECHNICAL DRAWINGS

