


## Start Surface IP66 Ø350mm START SURFACE IP66 1450LM 830 IK10 WHT 0049000



### Product features

- LED exterior surface mounted luminaire, 350mm diameter, 1450lm as max. lumen output, can be adjusted down to 700lm by internal switch, 14,5W power consumption max., 97lm/W efficacy, 3000K color temperature, CRI80, non-dimmable, IP66, IK10, 50,000 hours (L70), white housing, vandal resistant





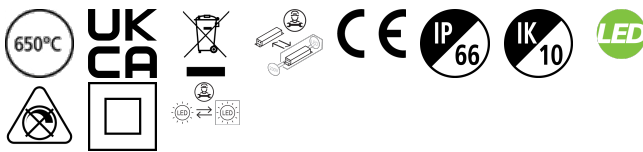


### PRODUCT OVERVIEW

Product name	START SURFACE IP66 1450LM 830 IK10 WHT
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Environment	Indoor, Outdoor
General application	Hospitality
ETIM Class	EC002892
E-number FI	4579478
Warranty	5 years
Fixture luminous flux (lm)	1450
Luminaire efficacy (lm/W)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	120
Photobiological Risk Group	RG0
Total power consumption (W)	14.5
Electrical protection	Class II
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP66
IK rating	IK10
Product EAN number	5410288490007

### PHOTOMETRY

**Start Surface IP66 Ø350mm**  
*START SURFACE IP66 1450LM 830 IK10 WHT*  
**0049000**

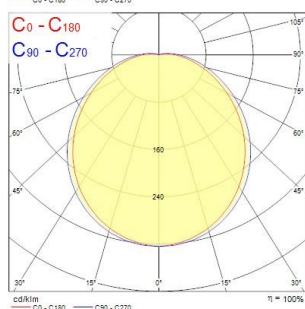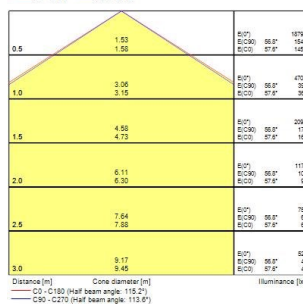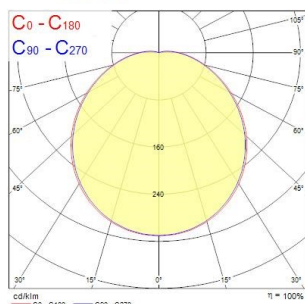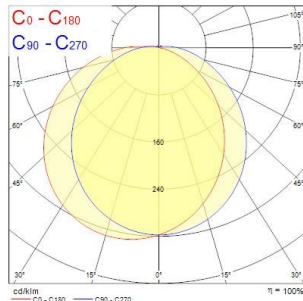

## TECHNICAL DRAWINGS

