


Sylproof Tubular LED - Microwave sensor

Sylproof Tubular LED 2X600 EB MW NW
0047613



Product features

- Aesthetically attractive and highly efficient LED tubular luminaire, opaque acrylic diffuser, stainless steel end caps and mounting brackets, rapid connector, as Sylvania Sylproof Tubular LED

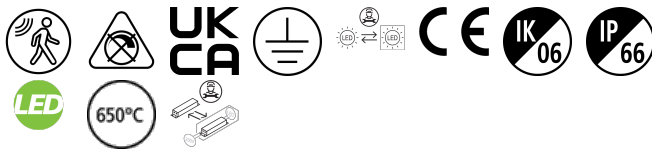

PRODUCT OVERVIEW

Product name	Sylproof Tubular LED 2X600 EB MW NW
Technology	LED
Cap/Base	N/A
Housing	Acrylic PMMA
Mount	Ceiling surface mounting
Environment	Interior
General application	Logistics & Industry
ETIM Class	EC000109
Warranty	5 years
Fixture luminous flux (lm)	2269
Luminous flux (lm)	2269
Luminaire efficacy (lm/W)	108.04
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG0
Total power consumption (W)	21
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	No
Housing colour	Transparent
IP rating	IP66
IK rating	IK06
Product EAN number	5410288476131

PHOTOMETRY

Sylproof Tubular LED - Microwave sensor

Sylproof Tubular LED 2X600 EB MW NW


0047613

Distance [m]	Core diameter [m]	E07	E180	E270
0.5	1.13 2.16	2811	48.9° 394	88.2° 97
1.0	2.26 4.33	888	48.9° 96	88.2° 24
1.5	3.39 6.48	232	48.9° 47	88.2° 11
2.0	4.52 8.66	164	48.9° 24	88.2° 6
2.5	5.65 10.82	105	48.9° 15	88.2° 4
3.0	6.78 12.99	73	48.9° 11	88.2° 3

Distance [m] Core diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 150 °)

— C90 - C270 (Half beam angle: 97 °)



TECHNICAL DRAWINGS

