


Sterling Bulkhead - LED

Sterling Bulkhead 4000K Silver
4054996



PRODUCT OVERVIEW

| | |
|------------------------|--|
| Product name | Sterling Bulkhead 4000K Silver |
| Technology | LED |
| Housing | Aluminium |
| Mount | Wall surface mounted |
| Environment | Exterior Interior |
| General application | Education, Hospitality, Logistics & Industry, Office |
| ETIM Class | EC002892 |
| E-number FI | 4579221 |
| Colour temperature (K) | 4000 |
| Control gear mounting | Integral |
| Housing colour | Silver |
| IP rating | IP55 |
| IK rating | IK09 |
| Product EAN number | 5026524549967 |

DATA TABLE

General data

| | |
|---------------------|--|
| Product name | Sterling Bulkhead 4000K Silver |
| Technology | LED |
| Housing | Aluminium |
| Mount | Wall surface mounted |
| Environment | Exterior Interior |
| General application | Education, Hospitality, Logistics & Industry, Office |
| ETIM Class | EC002892 |
| E-number FI | 4579221 |

Optical data

| | |
|---|-------------|
| Colour temperature (K) | 4000 |
| Correlated colour temperature range (K) | 4000 - 4000 |
| Adjustable chromaticity | N |
| Distribution type | Symmetric |

Sterling Bulkhead - LED

Sterling Bulkhead 4000K Silver
4054996

Electrical data

| | |
|-----------------------|----------|
| Mains voltage (V) | 230V~ |
| Control gear mounting | Integral |
| Transformer required | Yes |
| Drive current (mA) | 350 |


Physical data

| | |
|-----------------------------|------------------|
| Housing colour | Silver |
| IP rating | IP55 |
| IK rating | IK09 |
| Diffuser finish | Opal |
| Diffuser material | PC Polycarbonate |
| Reflector finish | White |
| Nominal Product Height (mm) | 128 |
| Max. Lamp Diameter (mm) - D | 350 |
| Weight (kg) | 3.4 |

Packaging

| | |
|---------------------------------------|----------------|
| Single packaging type | Carton |
| Product EAN number | 5026524549967 |
| Packaging single length / height (cm) | 36.0 |
| Packaging single width (cm) | 36.0 |
| Packaging single depth (cm) | 13.5 |
| DUN14 (outer) | 05026524549967 |
| Units per outer package | 1 |
| Packaging outer length / height (cm) | 36.0 |
| Packaging outer width (cm) | 36.0 |
| Packaging outer depth (cm) | 13.5 |

PHOTOMETRY

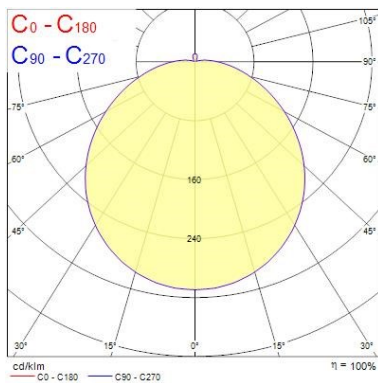


| Distance [m] | Cone diameter [m] | E _v (0°) E _v (C0) | E _v (3°) | Illuminance [lx] |
|--------------|-------------------|--|---------------------|------------------|
| 0.5 | 1.56 | 909 | 87.3° | 72 |
| 1.0 | 3.12 | 227 | 87.3° | 18 |
| 1.5 | 4.67 | 101 | 87.3° | 8 |
| 2.0 | 6.23 | 57 | 87.3° | 4 |
| 2.5 | 7.79 | 38 | 87.3° | 3 |
| 3.0 | 9.35 | 28 | 87.3° | 2 |

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 114.6°)

Sterling Bulkhead - LED

Sterling Bulkhead 4000K Silver
4054996

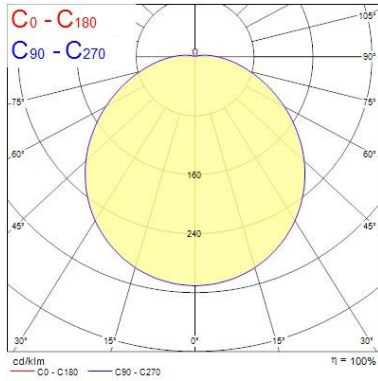

| Distance [m] | Cone diameter [m] | E(0°) E(C0) | E(0°) E(C90) | Footcandle [fc] |
|--------------|-------------------|----------------|-----------------|-----------------|
| 0.5 | 1.55 | 1707 | 57.2" | 138 |
| 1.0 | 3.10 | 427 | 57.2" | 34 |
| 1.5 | 4.66 | 190 | 57.2" | 15 |
| 2.0 | 6.21 | 107 | 57.2" | 8 |
| 2.5 | 7.76 | 68 | 57.2" | 5 |
| 3.0 | 9.31 | 47 | 57.2" | 4 |

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 114.4°)

TECHNICAL DRAWINGS

