

## Beacon Muse 26W

*Beacon Muse 26W 4K Trailing Edge L3 Black*  
2052854



### Product features

- Integrated LED spotlight, black RAL 9005, unique helix mechanism for adjusting beam angle from a 10° spot to a 65° flood, compact and minimalist design, ideal for museum, gallery and high-end retail applications, die-cast aluminium body, passive cooling heatsink, beam angle: 10° spot to 65° flood, optics: diffuse lens, colour temperature: 4000K neutral white, total system power: 29W, total fixture output: 925lm, LOR: 100%, colour rendering: Ra 97 typical, LED Chromacity: 3 step MacAdam ellipse, lifetime: 50,000 hours at 70% of the original output (L70), energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, electronic driver, trailing edge dimmable, electrical protection: CLASS I, three circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, lockable positioning using Allen key, dimensions: Ø79x167x85mm, weight: 1.2kg.



### PRODUCT OVERVIEW

Product name	Beacon Muse 26W 4K Trailing Edge L3 Black
Technology	LED
Housing	Aluminium
Mount	Track mounting
Environment	Interior
General application	Museums & Galleries
ETIM Class	EC001744
E-number FI	4274540
Warranty	5 years
Fixture luminous flux (lm)	925
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	97
Colour Consistency (SDCM)	3
Beam Angle (°)	10
Total power consumption (W)	26
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Integrated
Housing colour	Black
IP rating	IP20
IK rating	IK02
Product EAN number	5025768528547

### DATA TABLE

#### General data

Product name	Beacon Muse 26W 4K Trailing Edge L3 Black
Technology	LED
Housing	Aluminium
Mount	Track mounting

## Beacon Muse 26W

*Beacon Muse 26W 4K Trailing Edge L3 Black*  
2052854

Environment	Interior
General application	Museums & Galleries
ETIM Class	EC001744
E-number FI	4274540
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	925
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	97
Colour Consistency (SDCM)	3
Adjustable chromaticity	N
Beam Angle (°)	10
Distribution type	Direct

### Electrical data

Total power consumption (W)	26
Mains voltage (V)	220-240V~
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Integrated

### Physical data





Housing colour	Black
IP rating	IP20
IK rating	IK02
Reflector finish	None
Nominal Product Height (mm)	167
Weight (kg)	1.315

### Packaging

Single packaging type	Carton
Product EAN number	5025768528547
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	5025768528547
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

## PHOTOMETRY

## Beacon Muse 26W Beacon Muse 26W 4K Trailing Edge L3 Black 2052854

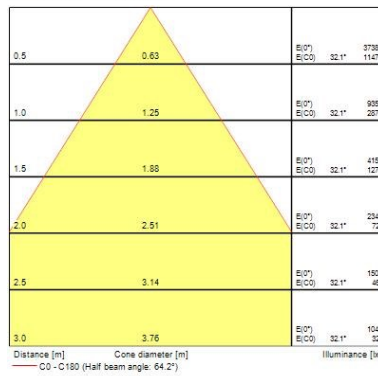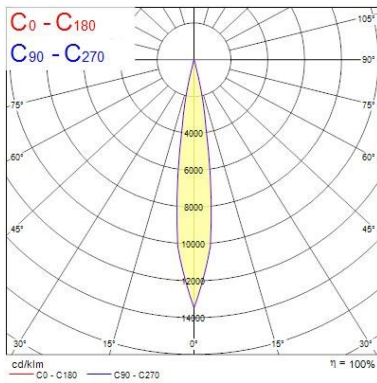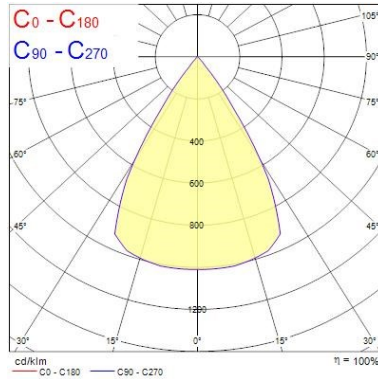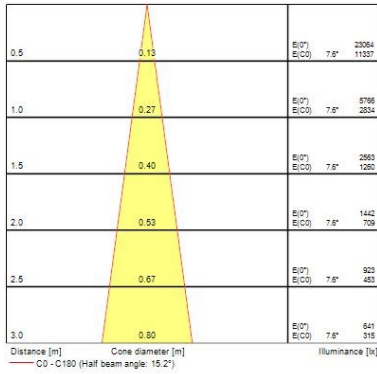

### TECHNICAL DRAWINGS

