

## Start Bollard M IP65

START Bollard M IP65 1100lm 830 BLK

0047940



### Product features

- Integrated LED bollard, contemporary design on a classic bollard, 1100LM, 26W, 42lm/W, 3000K, Electronic driver, Driver Current: 1200mA, CRI80, IP65, Ik10, 50,000hrs (L70), (HxWxD) 500x168x168mm, 5 step MacAdam ellipse, 5.5kg, RAL 9005, Class 1, 220-240V, energy class: A++, A+, A




## PRODUCT OVERVIEW

Product name	START Bollard M IP65 1100lm 830 BLK
Technology	LED
Environment	External
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Residential & Consumer, Retail
ETIM Class	EC000301
E-number FI	4579441
Warranty	5 years
Fixture luminous flux (lm)	1100
Luminaire efficacy (lm/W)	42
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	60
Photobiological Risk Group	RG1
Total power consumption (W)	26
Electrical protection	Class I
Dimmable	No
LED Flickering Rate	Medium (21% - 40%)
Housing colour	RAL 9005 - Jet black
IP rating	IP65
IK rating	IK10
Product EAN number	5410288479408

## PHOTOMETRY

## Start Bollard M IP65 *START Bollard M IP65 1100lm 830 BLK* 0047940

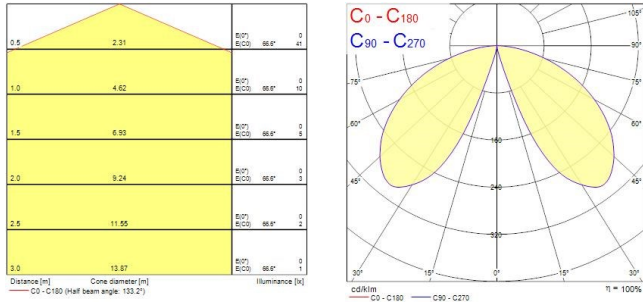

## TECHNICAL DRAWINGS

