

CurveLyte

CURVELYTE 1265x330 HO D/I 3K DALI WHITE

2093180



Product features

- CURVELYTE 1265x330 HO D/I 3K DALI WHITE is a suspended LED Linear luminaire with Direct / Indirect (70/30) distribution. Luminaire Dimensions: 1265x336x46mm, White body colour, IP20, IK06. Constant Current, Low LED flicker (<5%), Warm White (3000K) LED Colour Temperature, 6600lm, 55W, 120lm/W efficacy, CRI>80, 3 SDCM (3-step MacAdam ellipse) LED Colour Consistency, Lifespan 49,000 hours L80B20, Terminal block connection in the driver box. Glow Wire Test 650°C.



PRODUCT OVERVIEW

Product name	CURVELYTE 1265x330 HO D/I 3K DALI WHITE
Technology	LED
General application	Education, Hospitality, Office
ETIM Class	EC001743
E-number FI	4260868
Warranty	5 years
Fixture luminous flux (lm)	6600
Luminaire efficacy (lm/W)	120
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Glare control	< 23
Photobiological Risk Group	RG0
Total power consumption (W)	55
Electrical protection	Class I
Housing colour	White
IP rating	IP20
IK rating	IK06
Product EAN number	5025768931804

DATA TABLE

General data

Product name	CURVELYTE 1265x330 HO D/I 3K DALI WHITE
Technology	LED
General application	Education, Hospitality, Office
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001743
E-number FI	4260868
Warranty	5 years

CurveLyte

CURVELYTE 1265x330 HO D/I 3K DALI WHITE

2093180

Optical data

Fixture luminous flux (lm)	6600
Luminaire efficacy (lm/W)	120
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Glare control	< 23
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	55
Mains voltage (V)	230V~
Electrical protection	Class I
Drive current (mA)	1200
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lifespan L70 B50	161000
Lifespan L80 B20	49000

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK06
Diffuser material	PMMA Acrylic
Nominal Product Length (mm)	1265
Nominal Product Width (mm)	336
Nominal Product Height (mm)	46
Weight (kg)	5.8

Packaging

Single packaging type	Carton
Product EAN number	5025768931804
Packaging single length / height (cm)	135.0
Packaging single width (cm)	41.0
Packaging single depth (cm)	16.5
DUN14 (outer)	05025768931804
Units per outer package	1
Packaging outer length / height (cm)	135.0
Packaging outer width (cm)	41.0
Packaging outer depth (cm)	16.5

PHOTOMETRY

CurveLyte


CURVELYTE 1265x330 HO D/I 3K DALI WHITE

2093180

0.5	2.09 3.53	E(0°) E(C90) E(C0)	4512 153 46
1.0	4.17 7.07	E(0°) E(C90) E(C0)	1128 46 11
1.5	6.26 10.60	E(0°) E(C90) E(C0)	501 20 5
2.0	8.35 14.14	E(0°) E(C90) E(C0)	252 11 3
2.5	10.44 17.67	E(0°) E(C90) E(C0)	150 7 2
3.0	12.52 21.20	E(0°) E(C90) E(C0)	125 6 1

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 145.4°)
— C90 - C270 (Half beam angle: 126.8°)

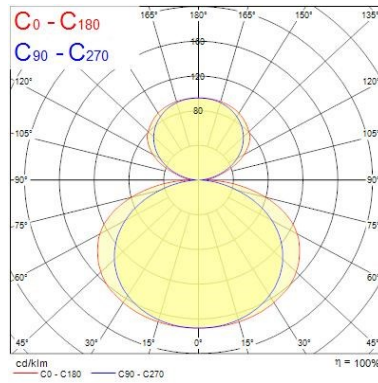

TECHNICAL DRAWINGS

