

## Myriad Adjustable Round - White with Silver bezel

MYRIAD ADJ ROUND WHITE 2700K PHDIM SILVER BZ  
2058031



### Product features

- The Myriad Adjustable Round recessed spotlight is a high efficient accent downlight, fixture color White, correlated colour temperature of 2700K, color rendering index Ra146, fixture lumen 567lm, total power consumption 10W, luminaire efficacy 57 lm/W, nominal light beam angle 24°, mains voltage 230-240V~ AC, control technology type: leading edge/trailing edge phase dim, product length 76mm, width 76mm, height 115mm, cut-out dimension 76mm, IP rating IP20, 5 years warranty.



### PRODUCT OVERVIEW

Product name	MYRIAD ADJ ROUND WHITE 2700K PHDIM SILVER BZ
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Hospitality, Office, Retail, Residential & Consumer
ETIM Class	EC001744
Warranty	5 years
Fixture luminous flux (lm)	567
Luminaire efficacy (lm/W)	57
LOR (%)	100
Colour temperature (K)	2700
Light colour	Candlelight
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	24
Photobiological Risk Group	RG1
Total power consumption (W)	10
Electrical protection	Class II
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5025768580316

### DATA TABLE

#### General data

Product name	MYRIAD ADJ ROUND WHITE 2700K PHDIM SILVER BZ
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Indoor

## Myriad Adjustable Round - White with Silver bezel

*MYRIAD ADJ ROUND WHITE 2700K PHDIM SILVER BZ*  
2058031

General application	Hospitality, Office, Retail, Residential & Consumer
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	567
Luminaire efficacy (lm/W)	57
LOR (%)	100
Colour temperature (K)	2700
Light colour	Candlelight
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM3
Adjustable chromaticity	N
Beam Angle (°)	24
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	10
Mains voltage (V)	230-240V~
Electrical protection	Class II
Transformer required	Yes
Drive current (mA)	350
Energy Efficiency Class (A->G) of contained light source	E
Nominal Frequency (Hz)	50/60Hz

### Lifetime data

Lifespan L70 B50	50000
------------------	-------

### Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Nominal Product Width (mm)	76
Nominal Product Height (mm)	115
Cutout Dimensions (W x L in mm or Diameter in mm)	76
Max. Lamp Diameter (mm) - D	90
Weight (kg)	0.38
Recessed Depth (mm)	115

### Packaging



Single packaging type	Carton
Product EAN number	5025768580316
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
DUN14 (outer)	05025768580316

## Myriad Adjustable Round - White with Silver bezel

MYRIAD ADJ ROUND WHITE 2700K PHDIM SILVER BZ  
2058031

Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

### PHOTOMETRY

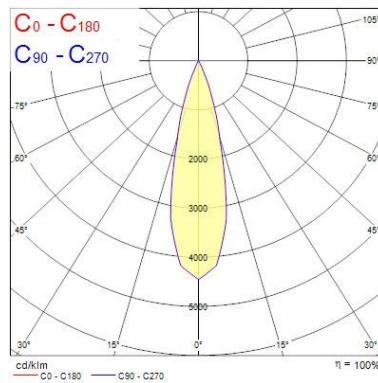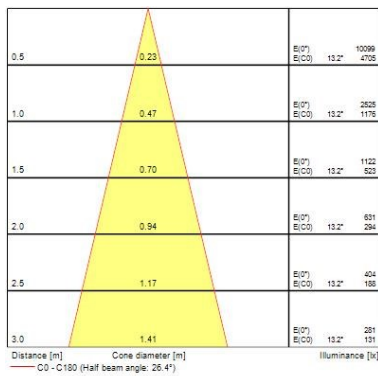

### TECHNICAL DRAWINGS

