

## Start Spot Scoop


START SPOT SCOOP 4500LM 940 MB WHITE

0060587



### Product features

- Recessed Adjustable Accent Downlight, integrated LED, die cast aluminium body, Ø205mm cut-out, CCT 4000K, SDCM<3, CRI90, 4500lm, total power consumption 48W, resulting in 94lm/W.

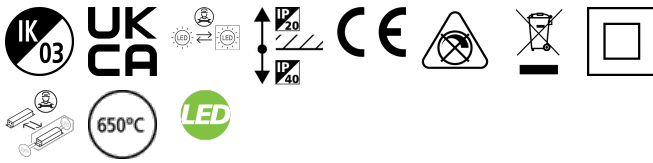


## PRODUCT OVERVIEW

Product name	START SPOT SCOOP 4500LM 940 MB WHITE
Technology	LED
Housing	Aluminium
Environment	Indoor
General application	Retail
ETIM Class	EC001744
E-number FI	4276984
Warranty	5 years
Fixture luminous flux (lm)	4500
Luminaire efficacy (lm/W)	94
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	32
Photobiological Risk Group	RG1
Total power consumption (W)	48
Electrical protection	Class II
Dimmable	No
LED Flickering Rate	Medium (21% - 40%)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288605876

## PHOTOMETRY

## Start Spot Scoop *START SPOT SCOOP 4500LM 940 MB WHITE* 0060587

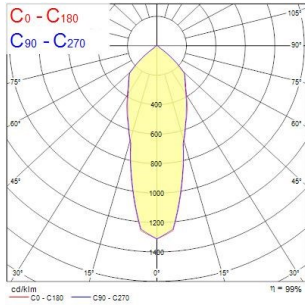

Distance [m]	Cone diameter [m]	E(0°) [lx]	E(C90) 15.2° [lx]	E(C0) 16.8° [lx]
0.5	0.25 0.30	2364	1049	1049
1.0	0.50 0.59	590	261	261
1.5	0.87 0.89	262	112	118
2.0	1.16 1.18	178	84	89
2.5	1.45 1.46	144	71	74
3.0	1.74 1.73	106	59	62

Distance [m]      Cone diameter [m]      Illuminance [lx]  
 — C0 - C180 (Half beam angle: 33.0°)  
 — C90 - C270 (Half beam angle: 32.4°)

### TECHNICAL DRAWINGS

