


## Sterling Bulkhead - LED

*Sterling Bulkhead 3000K Silver*  
4054988



### PRODUCT OVERVIEW

Product name	Sterling Bulkhead 3000K Silver
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Environment	Exterior Interior
General application	Education, Hospitality, Logistics & Industry, Office
ETIM Class	EC002892
Colour temperature (K)	3000
Control gear mounting	Integral
Housing colour	Silver
IP rating	IP55
IK rating	IK09
Product EAN number	5026524549882

### DATA TABLE

#### General data

Product name	Sterling Bulkhead 3000K Silver
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Environment	Exterior Interior
General application	Education, Hospitality, Logistics & Industry, Office
ETIM Class	EC002892

#### Optical data

Colour temperature (K)	3000
Correlated colour temperature range (K)	3000 - 3000
Adjustable chromaticity	N
Distribution type	Symmetric

#### Electrical data

Mains voltage (V)	230V~
Control gear mounting	Integral

## Sterling Bulkhead - LED

*Sterling Bulkhead 3000K Silver*  
4054988

Transformer required	Yes
Drive current (mA)	350



### Physical data

Housing colour	Silver
IP rating	IP55
IK rating	IK09
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	White
Nominal Product Height (mm)	128
Max. Lamp Diameter (mm) - D	350
Weight (kg)	3.4

### Packaging



Single packaging type	Carton
Product EAN number	5026524549882
Packaging single length / height (cm)	36.0
Packaging single width (cm)	36.0
Packaging single depth (cm)	13.5
DUN14 (outer)	05026524549882
Units per outer package	1
Packaging outer length / height (cm)	36.0
Packaging outer width (cm)	36.0
Packaging outer depth (cm)	13.5

## PHOTOMETRY

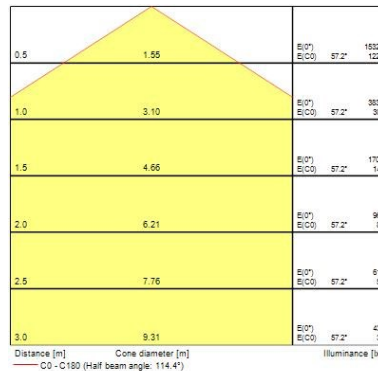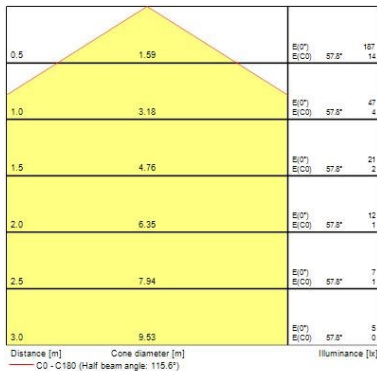

## Sterling Bulkhead - LED


*Sterling Bulkhead 3000K Silver*  
4054988

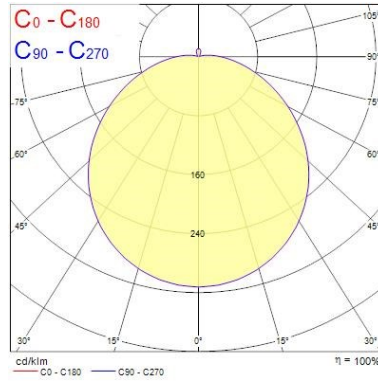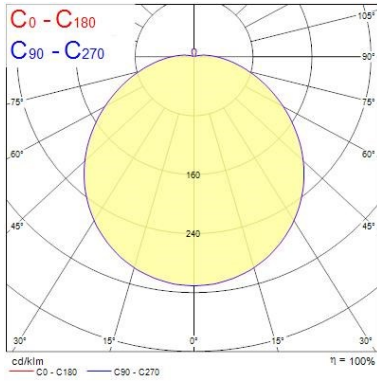


0.5	1.54	E(0°) E(C0)	1539 124
1.0	3.08	E(0°) E(C0)	308 31
1.5	4.62	E(0°) E(C0)	171 14
2.0	6.16	E(0°) E(C0)	96 8
2.5	7.70	E(0°) E(C0)	62 5
3.0	9.24	E(0°) E(C0)	43 3

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 114.0°)

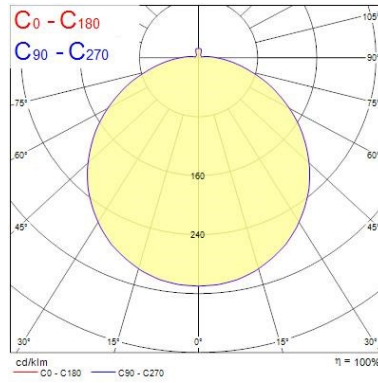

## TECHNICAL DRAWINGS



Dimensions (mm)