


Beacon Muse Xicato®

BEACON MUSE Xicato® 3500K O/B DIM LS3 White
2059777



Product features

- Integrated LED spotlight with Xicato® Artist LED Module, white RAL 9016, unique soft-touch ring, adjustable beam angle from a 8° spot to a 52° flood, compact and minimalist design, ideal for museum, gallery and high-end retail applications, die-cast aluminium body, passive cooling heatsink, beam angle: 8° spot to 52° flood, optics: aspheric glass lens, colour temperature: 3500K warm white, total system power: 20W, total fixture output: 369/641lm, luminaire efficacy: 33lm/W, LOR: 100%, colour rendering: Ra 98 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 700mA, electronic driver, dimmable via on-board potentiometer, power factor: 0.9 electrical protection: CLASS II, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø80x135x176mm, weight: 0.95kg

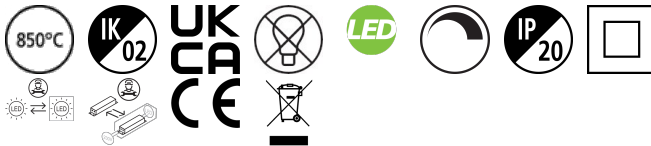

PRODUCT OVERVIEW

Product name	BEACON MUSE Xicato® 3500K O/B DIM LS3 White
Technology	LED
Housing	Aluminium
Mount	Track mounting
General application	Museums & Galleries
ETIM Class	EC001744
Warranty	5 years
Fixture luminous flux (lm)	369/641
Luminaire efficacy (lm/W)	33
LOR (%)	100
Colour temperature (K)	3500
CRI (Ra)	98
Colour Variation Initial (SDCM)	SDCM2
Photobiological Risk Group	RG1
Total power consumption (W)	20
Electrical protection	Class II
Control gear type	Other
Control gear mounting	Integral
Dimmable	Yes
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK02
Product EAN number	5025768597772

DATA TABLE

General data

Product name	BEACON MUSE Xicato® 3500K O/B DIM LS3 White
Technology	LED

Beacon Muse Xicato®

BEACON MUSE Xicato® 3500K O/B DIM LS3 White
2059777

Housing	Aluminium
Mount	Track mounting
General application	Museums & Galleries
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	5 years

Optical data

Fixture luminous flux (lm)	369/641
Luminaire efficacy (lm/W)	33
LOR (%)	100
Colour temperature (K)	3500
CRI (Ra)	98
Colour Variation Initial (SDCM)	SDCM2
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	20
Mains voltage (V)	220-240V~
Lamp power factor	0.95
Electrical protection	Class II
Control gear type	Other
Control gear mounting	Integral
Dimmable	Yes
Drive current (mA)	700
Inrush Current (A)	5
Inrush Duration (µs)	50
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	52
Max. Luminaires per 16A C Breaker	85
Max. Luminaires per 20A C Breaker	54
Max. Luminaires per 10A B Breaker	32
Max. Luminaires per 16A B Breaker	50
Max. Luminaires per 20A B Breaker	63

Lifetime data

Lifespan L70 B50	90000
Lifespan L80 B20	100000
Lifespan L90 B10	47500

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK02
Diffuser finish	Frosted
Diffuser material	PC Polycarbonate
Nominal Product Width (mm)	85

Beacon Muse Xicato®

BEACON MUSE Xicato® 3500K O/B DIM LS3 White
2059777

Nominal Product Height (mm)	176
Nominal Product Diameter (mm)	80
Weight (kg)	1.1





Packaging

Single packaging type	Carton
Product EAN number	5025768597772
Packaging single length / height (cm)	17.5
Packaging single width (cm)	17.5
Packaging single depth (cm)	15.0
DUN14 (outer)	05025768597772
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	17.5
Packaging outer depth (cm)	15.0

Safety data

Dry applications use only	Yes
---------------------------	-----

PHOTOMETRY

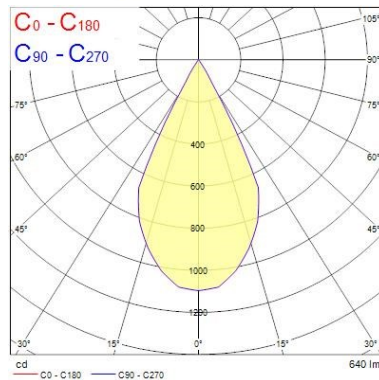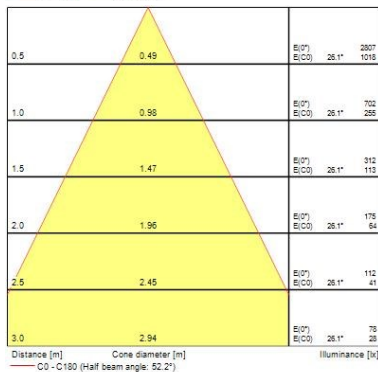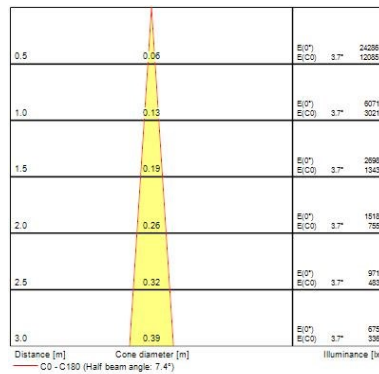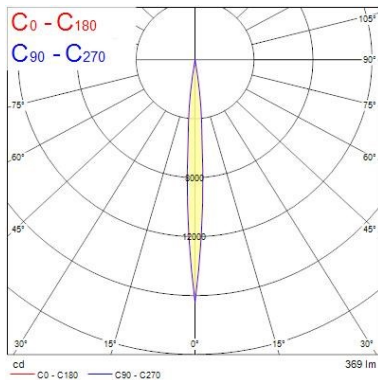

Beacon Muse Xicato®

BEACON MUSE Xicato® 3500K O/B DIM LS3 White
2059777

TECHNICAL DRAWINGS

