


## Beacon Muse Xicato®

BEACON MUSE Xicato® 3500K O/B DIM LS3 White  
2059777



### Product features

- Integrated LED spotlight with Xicato® Artist LED Module, white RAL 9016, unique soft-touch ring, adjustable beam angle from a 8° spot to a 52° flood, compact and minimalist design, ideal for museum, gallery and high-end retail applications, die-cast aluminium body, passive cooling heatsink, beam angle: 8° spot to 52° flood, optics: aspheric glass lens, colour temperature: 3500K warm white, total system power: 20W, total fixture output: 369/641lm, luminaire efficacy: 33lm/W, LOR: 100%, colour rendering: Ra 98 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 700mA, electronic driver, dimmable via on-board potentiometer, power factor: 0.9 electrical protection: CLASS II, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø80x135x176mm, weight: 0.95kg

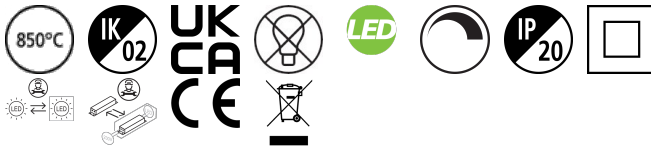


### PRODUCT OVERVIEW

Product name	BEACON MUSE Xicato® 3500K O/B DIM LS3 White
Technology	LED
Housing	Aluminium
Mount	Track mounting
General application	Museums & Galleries
ETIM Class	EC001744
Warranty	5 years
Fixture luminous flux (lm)	369/641
Luminaire efficacy (lm/W)	33
LOR (%)	100
Colour temperature (K)	3500
CRI (Ra)	98
Colour Variation Initial (SDCM)	SDCM2
Photobiological Risk Group	RG1
Total power consumption (W)	20
Electrical protection	Class II
Control gear type	Other
Control gear mounting	Integral
Dimmable	Yes
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK02
Product EAN number	5025768597772

### PHOTOMETRY

## Beacon Muse Xicato® BEACON MUSE Xicato® 3500K O/B DIM LS3 White 2059777

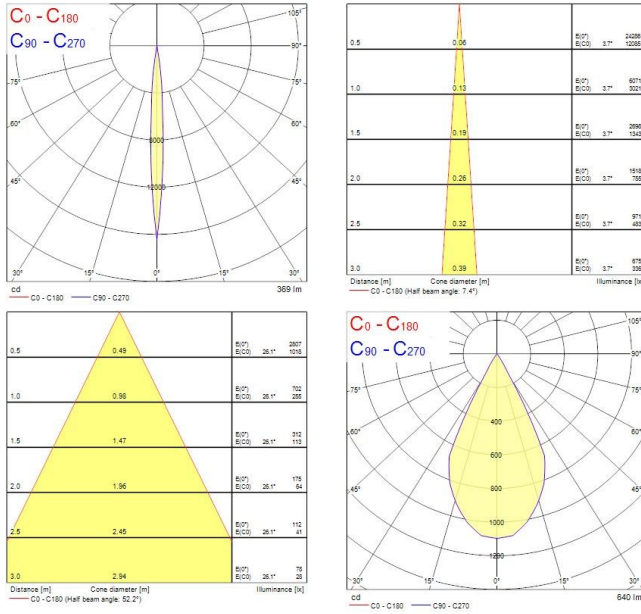

## TECHNICAL DRAWINGS

