

## Start Tubular - Electronic


*Start Tubular IP66 249 EB 840*

0042346



### Product features

- 

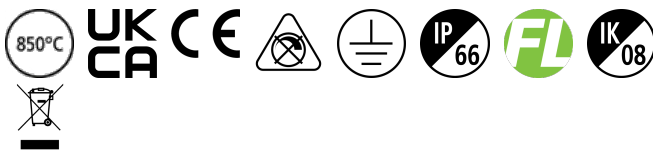


## PRODUCT OVERVIEW

|                             |                                   |
|-----------------------------|-----------------------------------|
| Product name                | Start Tubular IP66 249 EB 840     |
| Technology                  | Fluorescent                       |
| Cap/Base                    | G5                                |
| Housing                     | PC Polycarbonate                  |
| Environment                 | Interior                          |
| General application         | Hospitality, Logistics & Industry |
| ETIM Class                  | EC000109                          |
| Warranty                    | 2 years                           |
| Fixture luminous flux (lm)  | 6245                              |
| Luminaire efficacy (lm/W)   | 72                                |
| LOR (%)                     | 75                                |
| Colour temperature (K)      | 4000                              |
| Light colour                | Neutral White                     |
| CRI (Ra)                    | 85                                |
| Total power consumption (W) | 87                                |
| Electrical protection       | Class I                           |
| Control gear type           | Electronic ballast                |
| Dimmable                    | No                                |
| Housing colour              | RAL 9016 - Traffic white / Bezel  |
| IP rating                   | IP66                              |
| IK rating                   | IK08                              |
| Product EAN number          | 5410288423463                     |
| Light source included       | 0002777                           |

## PHOTOMETRY

Start Tubular - Electronic  
Start Tubular IP66 249 EB 840  
0042346

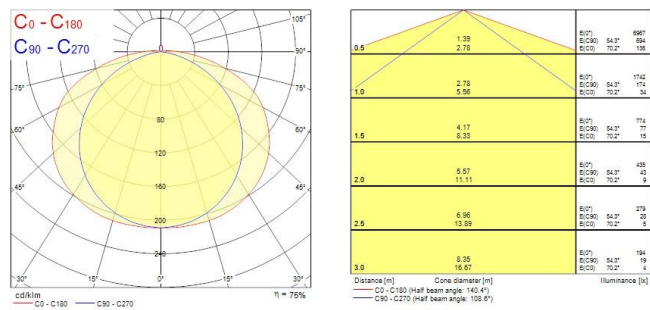

TECHNICAL DRAWINGS

