

Sylproof Tubular LED - Microwave sensor

Sylproof Tubular LED 1X1500 EB MW WW

0047618



Product features

- Aesthetically attractive and highly efficient LED tubular luminaire, opaque acrylic diffuser, stainless steel end caps and mounting brackets, rapid connector, as Sylvania Sylproof Tubular LED




PRODUCT OVERVIEW

Product name	Sylproof Tubular LED 1X1500 EB MW WW
Technology	LED
Cap/Base	N/A
Housing	Acrylic PMMA
Mount	Ceiling surface mounting
Environment	Interior
General application	Logistics & Industry
ETIM Class	EC000109
Warranty	5 years
Fixture luminous flux (lm)	3223
Luminous flux (lm)	3223
Luminaire efficacy (lm/W)	101.99
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG0
Total power consumption (W)	31.6
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	No
Housing colour	Transparent
IP rating	IP66
IK rating	IK06
Product EAN number	5410288476186

PHOTOMETRY

Sylproof Tubular LED - Microwave sensor
Sylproof Tubular LED 1X1500 EB MW WW
0047618

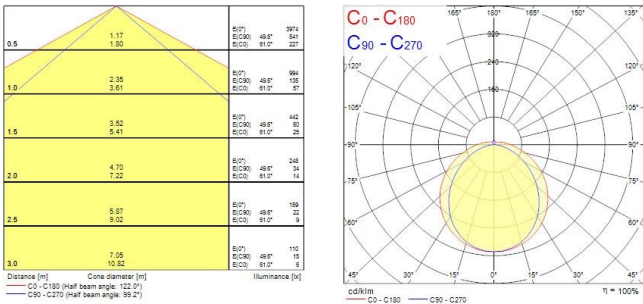

TECHNICAL DRAWINGS

