

## Sylproof Tubular - Electronic

*Sylproof Tubular IP66 228 EB 830 RAP*  
0042428




### PRODUCT OVERVIEW

Product name	Sylproof Tubular IP66 228 EB 830 RAP
Technology	Fluorescent
Cap/Base	G5
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
Environment	Interior
General application	Hospitality, Logistics & Industry
ETIM Class	EC000109
Fixture luminous flux (lm)	4141
Luminaire efficacy (lm/W)	77
LOR (%)	80
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	85
Total power consumption (W)	54
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	No
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP66
IK rating	IK10
Product EAN number	5410288424286
Light source included	0002766

### PHOTOMETRY

Sylproof Tubular - Electronic  
Sylproof Tubular IP66 228 EB 830 RAP  
0042428

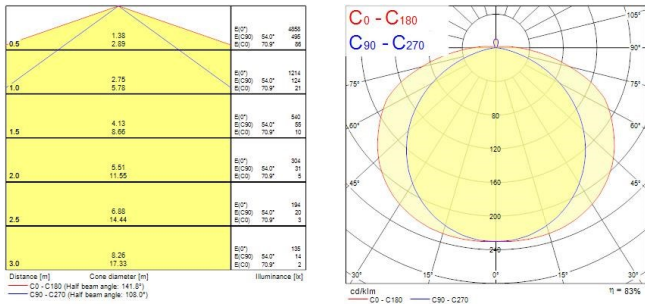

TECHNICAL DRAWINGS

