

Start Flood IP66 Symmetric

Start Flood IP66 42000lm 740 WB
0048214



Product features


- Exterior LED Floodlight, comes complete with 1500mm flying lead and adjustable bracket, aluminium housing, clear glass diffuser, IP66, IK08, Class I, 4000K, Non-dimming, 42800lm, 300W, 143lm/W, CRI70, Symmetrical Wide beam angle (60°), 100000 hrs L90B10 lifespan, 567 x 465 x 97mm (LxWxD) dimensions, 9.6kg weight.



PRODUCT OVERVIEW

Product name	Start Flood IP66 42000lm 740 WB
Technology	LED
General application	Logistics & Industry
ETIM Class	EC001744
E-number FI	4579466
Warranty	5 years
Fixture luminous flux (lm)	42800
Luminaire efficacy (lm/W)	143
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	70
Beam Angle (°)	60
Photobiological Risk Group	RG1
Total power consumption (W)	300
Electrical protection	Class I
IP rating	IP66
IK rating	IK08
Product EAN number	5410288482149

PHOTOMETRY

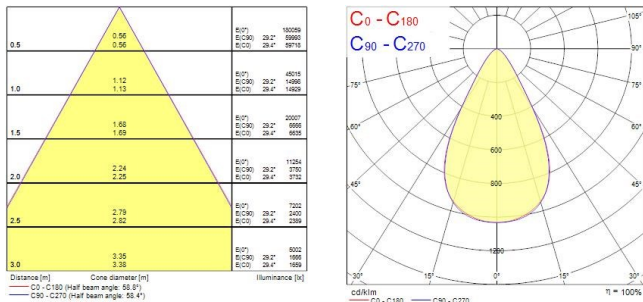

Start Flood IP66 Symmetric *Start Flood IP66 42000lm 740 WB* 0048214

TECHNICAL DRAWINGS

