


Pixer Wall 325

PIXER WALL 325x325 HO 1P 3000K SSC01
2069455



Product features

- PIXER WALL 325X325 HO 1P 3000K SSC01 is a high performance low glare wall or ceiling surface mounted luminaire. Diffuser is made of optical grade polycarbonate with an optical film for high efficacy and excellent glare control. Suitable for offices where aesthetics is important. Dimensions 257x257x79mm, White colour - RAL9010. Sylsmart Bluetooth controls, 3000K Warm White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Lumen package of 1850 lm, total power consumption 17W, efficacy 109lm/W. Lifespan 67,000 hours L90B10. UGR<20. IK07, IP20. Electrical protection: Class II. Glow wire test 850°C.

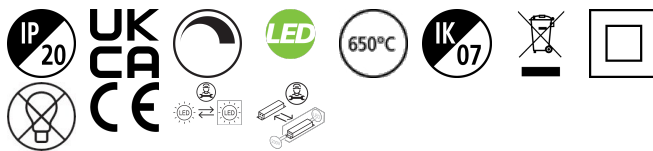



PRODUCT OVERVIEW

Product name	PIXER WALL 325x325 HO 1P 3000K SSC01
Technology	LED
Housing	Steel
Mount	Wall surface mounted
General application	Education, Hospitality, Office
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	1850
Luminaire efficacy (lm/W)	109
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 20
Photobiological Risk Group	RG0
Total power consumption (W)	17
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Integral
Dimmable	Yes
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5025768694556

Pixer Wall 325

PIXER WALL 325x325 HO 1P 3000K SSC01
2069455

PHOTOMETRY



TECHNICAL DRAWINGS

